LORO-X RATTENSTOP OHNE REIN.-ÖFFN. 100

LORO-X Rat Stop without cleaning opening DN 100

Text pentru caietul de sarcini

LORO-X rat-stop, made of steel, hot-dip galvanized, without clean-out opening, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, flared pipe with internal sharp pointed tips that prevent rats and animals from climbing up. DN100.

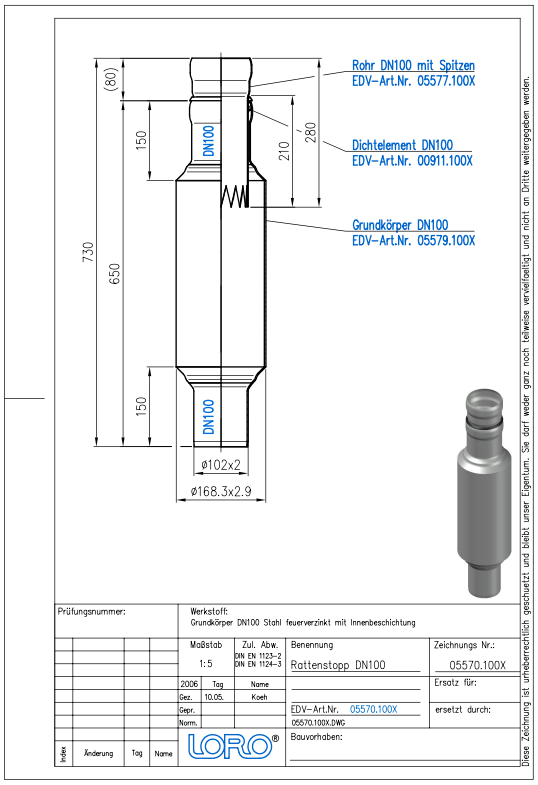

Date articol

Cod EAN	**4038088073117**
Clasă ETIM	**EC011386**
Diametru nominal	**DN 100**
Dimensiuni exterioare (ÎxLxA)	**168 x 168 x 754 mm**
Greutate	**7,20 Kg (STK)**
Grupă de produse	**2**
Număr tarif vamal	**73089098**
Material / Culoare	**Stahl feuerverzinkt, Silber**

Notă de utilizare

Die wirkungsvolle Sperre gegen das Vordringen von Ratten in Hausabflussleitungen.Die Praxis zeigt, dass es Ratten gelingt, über Steig- und Falleitungen DN 70, DN 100 und DN 125 aus der Kanalisation in das Haus-Abflußsystem und von dort bis in Wohnbereiche vorzudringen.Durch den LORO-X Rattenstop, bestehend aus LORO-X Rohr, feuerverzinkt, mit Innenbeschichtung und einem Einsatzrohr aus Edelstahl 1.4301, werden Ratten erfolgreich am Vordringen in Fall- und Steigleitungen gehindert.

Descărcări

Alles online

Instrucțiuni de montaj (PDF)
Certificat (PDF)
BIM 3D (STEP)
Desen CAD (PDF)
CAD 2D (DXF)
BIM 3D (IFC)
Broșură (PDF)
CAD 3D (DWG)