LORO-X RATTENSTOP M.R-ÖFFN.DN 125

LORO-X RATTENSTOP with cleaning opening DN 125

Opis

LORO-X rat-stop, made of steel, hot-dip galvanized, with clean-out opening, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, flared pipe with internal sharp pointed tips that prevent rats and animals from climbing up. DN125.

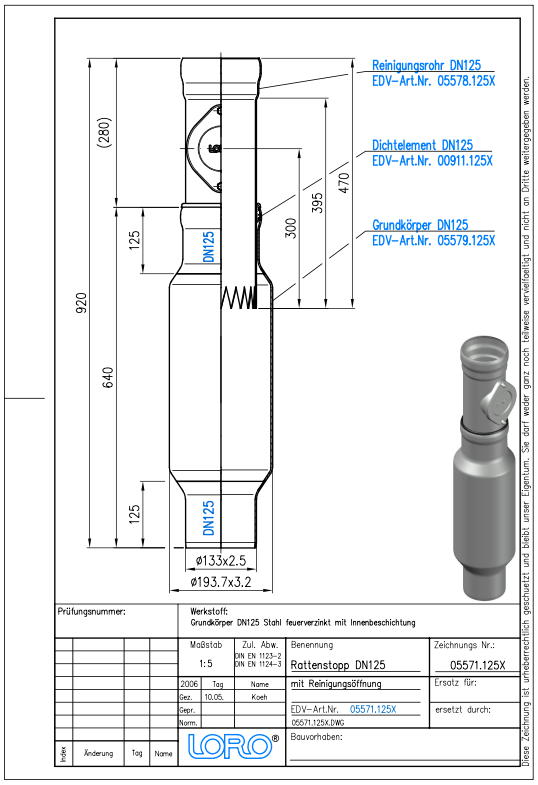

Podaci o artiklu

EAN kod	4038088075135
ETIM klasa	EC010323
Nazivni promjer	DN 125
Vanjske mjere (VxŠxD)	194 x 194 x 942 mm
Težina	11,30 Kg (STK)
Grupa proizvoda	2
Carinski tarifni broj	73089098
Materijal / Boja	Stahl feuerverzinkt, Silber

Napomena za upotrebu

Die wirkungsvolle Sperre gegen das Vordringen von Ratten in Hausabflussleitungen.Die Praxis zeigt, dass es Ratten gelingt, über Steig- und Falleitungen DN 70, DN 100 und DN 125 aus der Kanalisation in das Haus-Abflußsystem und von dort bis in Wohnbereiche vorzudringen.Durch den LORO-X Rattenstop, bestehend aus LORO-X Rohr, feuerverzinkt, mit Innenbeschichtung und einem Einsatzrohr aus Edelstahl 1.4301, werden Ratten erfolgreich am Vordringen in Fall- und Steigleitungen gehindert.

Preuzimanja

Alles online

Upute za ugradnju (PDF)
Dimenzijski crtež (PDF)
Prospekt (PDF)
Certifikat (PDF)
CAD 2D (DXF)
CAD 3D (DWG)
BIM 3D (STEP)
BIM 3D (IFC)