LORO-X RATTENSTOP M.R-ÖFFN.DN 125

LORO-X RATTENSTOP with cleaning opening DN 125

Descrição

LORO-X rat-stop, made of steel, hot-dip galvanized, with clean-out opening, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, flared pipe with internal sharp pointed tips that prevent rats and animals from climbing up. DN125.

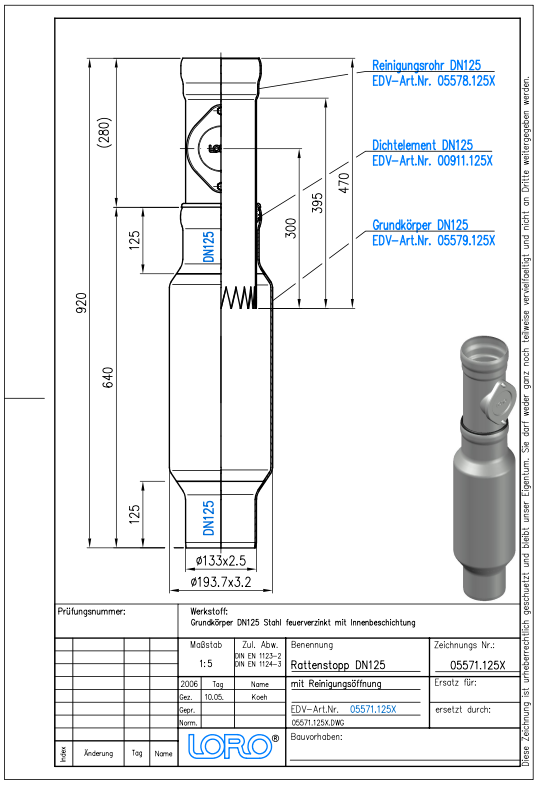

Dados do artigo

Código EAN	4038088075135
Classe ETIM	EC010323
Diâmetro nominal	DN 125
Medidas exteriores (AxLxP)	194 x 194 x 942 mm
Peso	11,30 Kg (STK)
Grupo de produtos	2
Número de pauta aduaneira	73089098
Material / Cor	Stahl feuerverzinkt, Silber

Nota de utilização

Die wirkungsvolle Sperre gegen das Vordringen von Ratten in Hausabflussleitungen.Die Praxis zeigt, dass es Ratten gelingt, über Steig- und Falleitungen DN 70, DN 100 und DN 125 aus der Kanalisation in das Haus-Abflußsystem und von dort bis in Wohnbereiche vorzudringen.Durch den LORO-X Rattenstop, bestehend aus LORO-X Rohr, feuerverzinkt, mit Innenbeschichtung und einem Einsatzrohr aus Edelstahl 1.4301, werden Ratten erfolgreich am Vordringen in Fall- und Steigleitungen gehindert.

Transferências

Alles online

Instruções de instalação (PDF)
Homologação (PDF)
BIM 3D (STEP)
Desenho cotado (PDF)
CAD 2D (DXF)
BIM 3D (IFC)
Brochura (PDF)
CAD 3D (DWG)