LORO-X RATTENSTOP M.R-ÖFFN.DN 125

LORO-X RATTENSTOP with cleaning opening DN 125

Beskrivelse

LORO-X rat-stop, made of steel, hot-dip galvanized, with clean-out opening, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, flared pipe with internal sharp pointed tips that prevent rats and animals from climbing up. DN125.

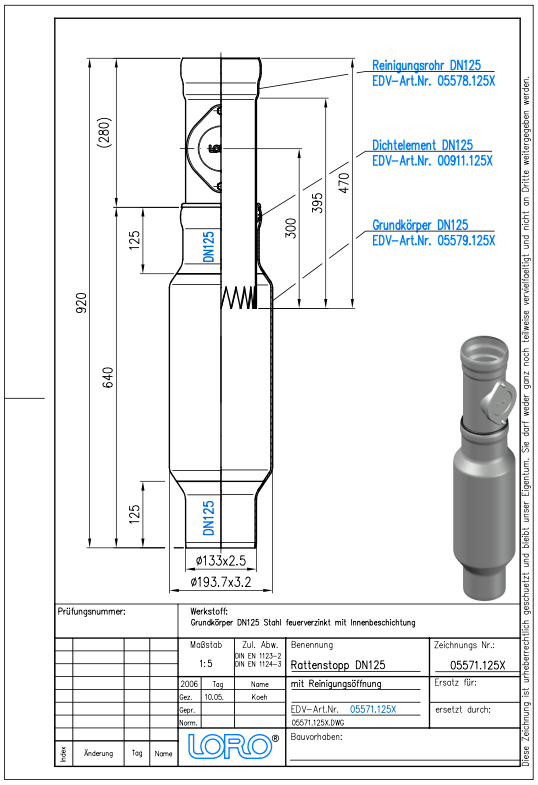

Artikeldata

EAN-kode	**4038088075135**
ETIM Klasse	**EC010323**
Nominel diameter	**DN 125**
Ydermål (HxBxL)	**194 x 194 x 942 mm**
Vægt	**11,30 Kg (STK)**
Produktgruppe	**2**
Toldtarifnummer	**73089098**
Materiale / Farve	**Stahl feuerverzinkt, Silber**

Brugsanvisning

Die wirkungsvolle Sperre gegen das Vordringen von Ratten in Hausabflussleitungen.Die Praxis zeigt, dass es Ratten gelingt, über Steig- und Falleitungen DN 70, DN 100 und DN 125 aus der Kanalisation in das Haus-Abflußsystem und von dort bis in Wohnbereiche vorzudringen.Durch den LORO-X Rattenstop, bestehend aus LORO-X Rohr, feuerverzinkt, mit Innenbeschichtung und einem Einsatzrohr aus Edelstahl 1.4301, werden Ratten erfolgreich am Vordringen in Fall- und Steigleitungen gehindert.

Downloads

Alles online

- Installationsvejledning (PDF)
- Certifikat (PDF)
- BIM 3D (STEP)
- Måltegning (PDF)
- CAD 2D (DXF)
- BIM 3D (IFC)
- Brochure (PDF)
- CAD 3D (DWG)