LORO-X RATTENSTOP M.R-ÖFFN,110 MM,AUSL.U

LORO-X RATTENSTOP with cleaning opening 110 mm outlet and socket DN 100

Kuvaus

LORO-X rat-stop, made of steel, hot-dip galvanized, with clean-out opening, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, flared pipe with internal sharp pointed tips that prevent rats and animals from climbing up. Discharge end 110 mm diameter, DN100.

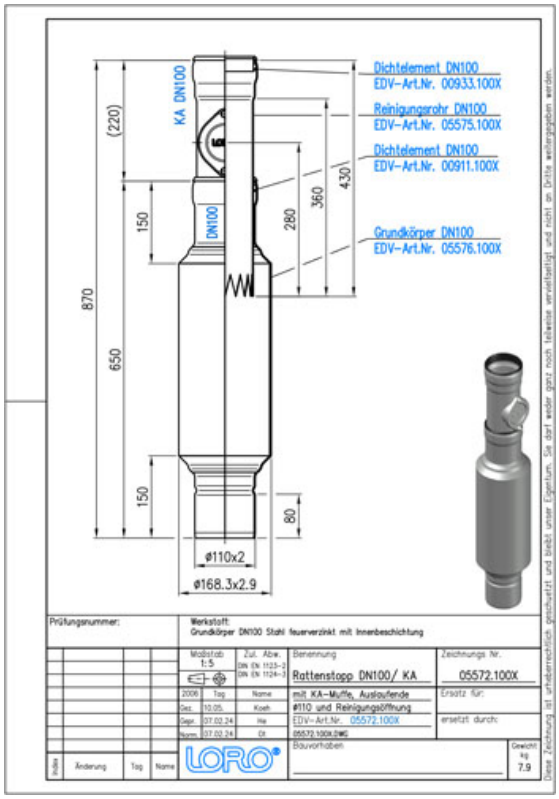

Tuotetiedot

EAN-koodi	**4038088082768**
ETIM-luokka	**EC010323**
Nimellishalkaisija	**DN 100**
Ulkomitat (KxLxS)	**168 x 168 x 901 mm**
Paino	**7,90 Kg (STK)**
Tuoteryhmä	**2**
Tullitariffin numero	**73089098**
Materiaali / Väri	**Stahl feuerverzinkt, Silber**

Käyttöohje

Die wirkungsvolle Sperre gegen das Vordringen von Ratten in Hausabflussleitungen.Die Praxis zeigt, dass es Ratten gelingt, über Steig- und Falleitungen DN 70, DN 100 und DN 125 aus der Kanalisation in das Haus-Abflußsystem und von dort bis in Wohnbereiche vorzudringen.Durch den LORO-X Rattenstop, bestehend aus LORO-X Rohr, feuerverzinkt, mit Innenbeschichtung und einem Einsatzrohr aus Edelstahl 1.4301, werden Ratten erfolgreich am Vordringen in Fall- und Steigleitungen gehindert.

Lataukset

Alles online

Asennusohje (PDF)
Hyväksyntä (PDF)
BIM 3D (STEP)
Mittapiirustus (PDF)
CAD 2D (DXF)
BIM 3D (IFC)
Esite (PDF)
CAD 3D (DWG)