

LX-ANSCHLUSSSTÜCK DN80 M. KURZMUFFE UND

LORO-X connection piece with short socket and reduced insertion end DN 80

Описание

LORO-X connector made of steel, hot-dip galvanized, with short socket and reduced insertion end, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, DN80




Данни за артикула

ЕАН код	4038088109243
ЕТИМ клас	EC011386
Номинален диаметър	DN 80
Външни размери (ВxШxД)	103 x 103 x 115 mm
Тегло	0,40 Kg (STK)
Продуктова група	1
Митнически тарифен номер	73063012
Материал / Цвят	Stahl feuerverzinkt, Silber

Забележка за употреба

kein Verwendungshinweis notwendig

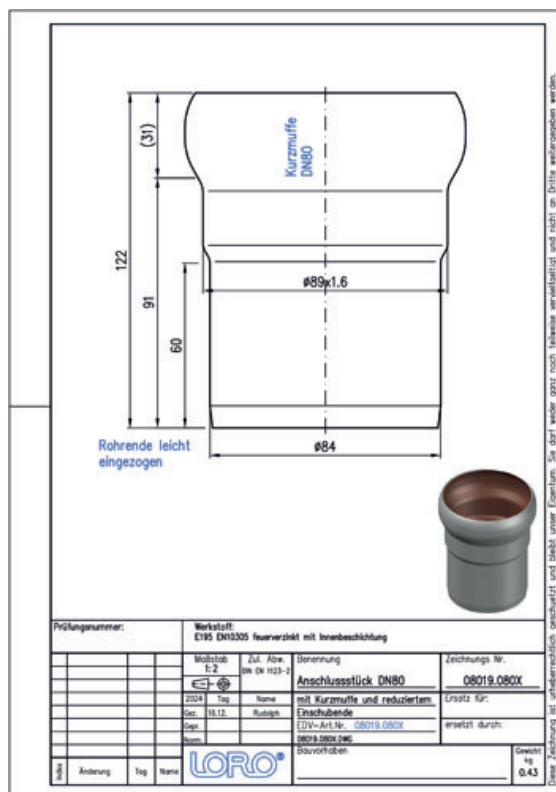

Изтегляния



Alles online

[Инструкция за монтаж \(PDF\)](#)

[Сертификат \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[CAD чертеж \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Брошура \(PDF\)](#)

[CAD 3D \(DWG\)](#)