

LX-ANSCHLUSSSTÜCK DN80 M. KURZMUFFE UND

LORO-X connection piece with short socket and reduced insertion end DN 80

Beschrijving

LORO-X connector made of steel, hot-dip galvanized, with short socket and reduced insertion end, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, DN80




Artikelgegevens

EAN-code	4038088109243
ETIM Klasse	EC011386
Nominale diameter	DN 80
Buitenafmetingen (HxBxL)	103 x 103 x 115 mm
Gewicht	0,40 Kg (STK)
Productgroep	1
Douanetariefnummer	73063012
Materiaal / Kleur	Stahl feuerverzinkt, Silber

Gebruiksaanwijzing

kein Verwendungshinweis notwendig

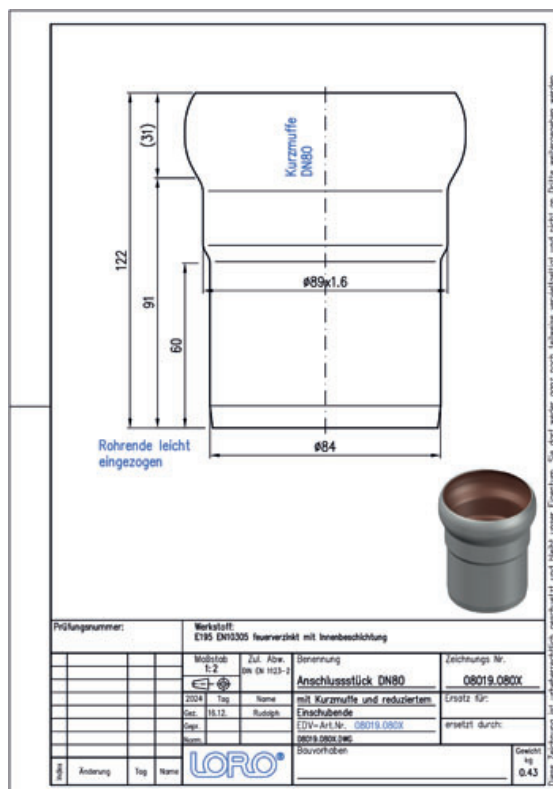

Downloads



Alles online

[Installatiehandleiding \(PDF\)](#)

[Certificaat \(PDF\)](#)

BIM 3D (STEP)

[Maattekening \(PDF\)](#)

CAD 2D (DXF)

BIM 3D (IFC)

[Brochure \(PDF\)](#)

CAD 3D (DWG)