

LX-ANSCHLUSSSTÜCK DN80 M. KURZMUFFE UND

LORO-X connection piece with short socket and reduced insertion end DN 80

Opis

LORO-X connector made of steel, hot-dip galvanized, with short socket and reduced insertion end, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, DN80




Dane artykułu

Kod EAN	4038088109243
Klasa ETIM	EC011386
Średnica nominalna	DN 80
Wymiary zewnętrzne (WxSxD)	103 x 103 x 115 mm
Waga	0,40 Kg (STK)
Grupa produktów	1
Numer taryfy celnej	73063012
Materiał / Kolor	Stahl feuerverzinkt, Silber

Wskazówki dotyczące użytkowania

kein Verwendungshinweis notwendig

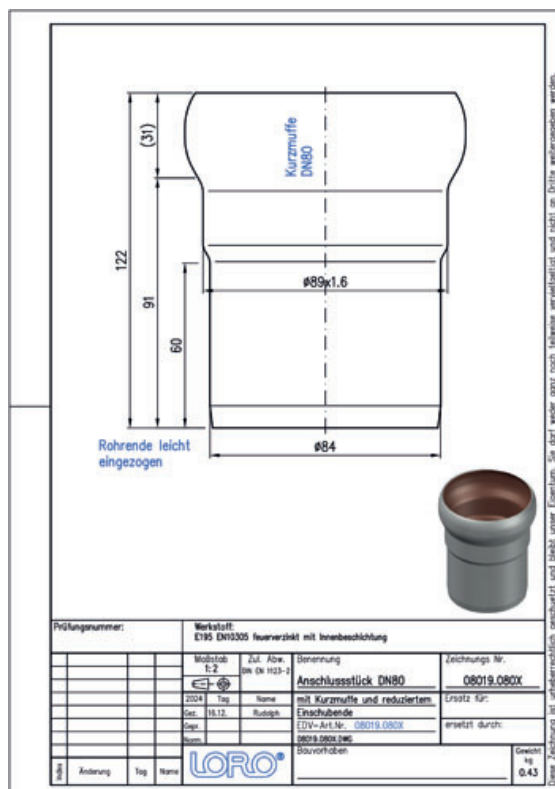

Pobieranie



Alles online

[Instrukcja montażu \(PDF\)](#)

[Certyfikat \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Rysunek wymiarowy \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Broszura \(PDF\)](#)

[CAD 3D \(DWG\)](#)