


LX-ANSCHLUSSSTÜCK DN100 M.KURZMUFFE UND

LORO-X connection piece with short socket and reduced insertion end DN 100

Description

LORO-X connector made of steel, hot-dip galvanized, with short socket and reduced insertion end, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, DN100

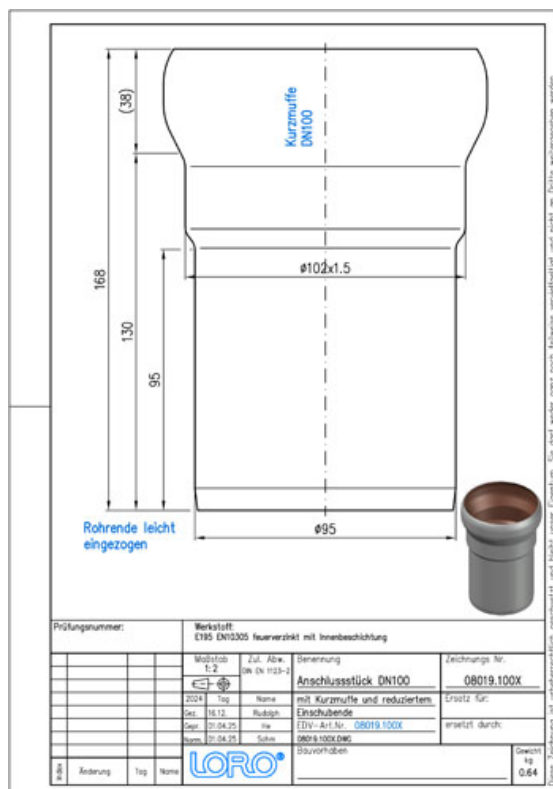

Article information

EAN Code	4038088109250
ETIM Class	EC011386
Nominal diameter	DN 100
Outside measurements (HxWxL)	118 x 118 x 155 mm
Weight	0,60 Kg (STK)
Product group	1
Customs tariff number	73063012
Material / Color	Stahl feuerverzinkt, Silber

Usage note

kein Verwendungshinweis notwendig

Downloads



Alles online

[Installation \(PDF\)](#)

[Certificate \(PDF\)](#)

BIM 3D (IFC)

[CAD drawing \(PDF\)](#)

CAD 3D (DWG)

[Brochure \(PDF\)](#)

BIM 3D (STEP)