

LX-ANSCHLUSSSTÜCK DN100 M.KURZMUFFE UND

LORO-X connection piece with short socket and reduced insertion end DN 100

Beskrivning

LORO-X connector made of steel, hot-dip galvanized, with short socket and reduced insertion end, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, DN100




Artikeldata

EAN-kod	4038088109250
ETIM-klass	EC011386
Nominell diameter	DN 100
Yttermått (HxBxL)	118 x 118 x 155 mm
Vikt	0,60 Kg (STK)
Produktgrupp	1
Tullnummer	73063012
Material / Färg	Stahl feuerverzinkt, Silber

Användningsanvisning

kein Verwendungshinweis notwendig

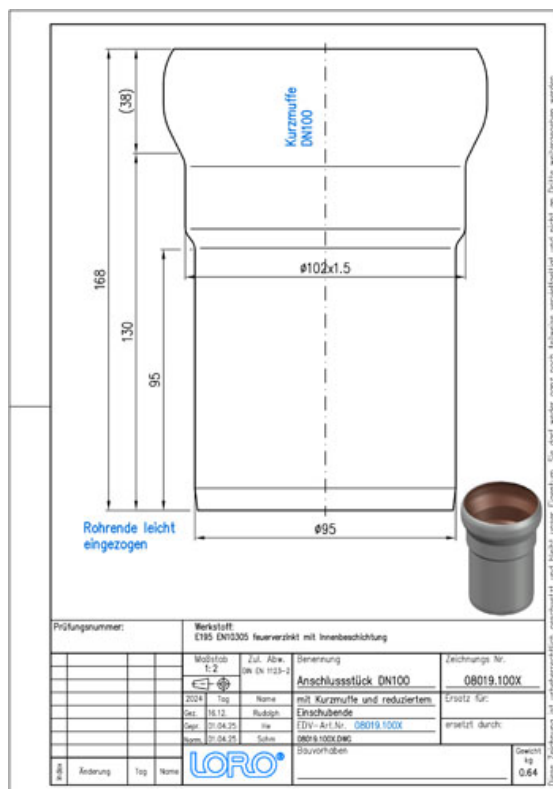

Nedladdningar



Alles online

[Monteringsanvisning \(PDF\)](#)

[Godkännande \(PDF\)](#)

BIM 3D (IFC)

[Måttritning \(PDF\)](#)

CAD 3D (DWG)

[Broschyr \(PDF\)](#)

BIM 3D (STEP)