
LX-ANSCHLUSSSTÜCK DN100 M.KURZMUFFE UND

LORO-X connection piece with short socket and reduced insertion end DN 100

Text pentru caietul de sarcini

LORO-X connector made of steel, hot-dip galvanized, with short socket and reduced insertion end, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, DN100



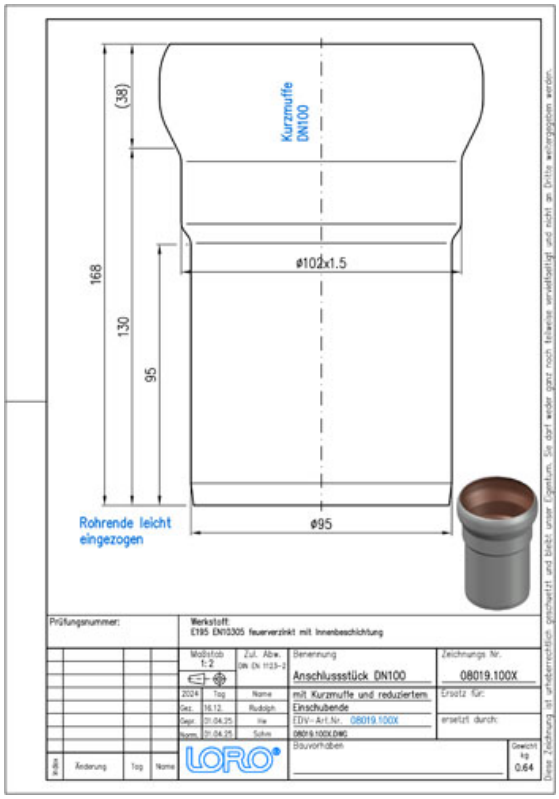

Date articol

Cod EAN	**4038088109250**
Clasă ETIM	**EC011386**
Diametru nominal	**DN 100**
Dimensiuni exterioare (ÎxLxA)	**118 x 118 x 155 mm**
Greutate	**0,60 Kg (STK)**
Grupă de produse	**1**
Număr tarif vamal	**73063012**
Material / Culoare	**Stahl feuerverzinkt, Silber**

Notă de utilizare

kein Verwendungshinweis notwendig

Descărcări

Alles online

Instrucțiuni de montaj (PDF)
Certificat (PDF)
BIM 3D (IFC)
Desen CAD (PDF)
CAD 3D (DWG)
Broșură (PDF)
BIM 3D (STEP)