

LX-ANSCHLUSSSTÜCK DN100 M.KURZMUFFE UND

LORO-X connection piece with short socket and reduced insertion end DN 100

Popis

LORO-X connector made of steel, hot-dip galvanized, with short socket and reduced insertion end, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, DN100




Údaje o artikli

EAN kód	4038088109250
ETIM trieda	EC011386
Menovitý priemer	DN 100
Vonkajšie rozmery (VxŠxH)	118 x 118 x 155 mm
Hmotnosť	0,60 Kg (STK)
Skupina produktov	1
Colný sadzobník	73063012
Materiál / Farba	Stahl feuerverzinkt, Silber

Pokyny na použitie

kein Verwendungshinweis notwendig

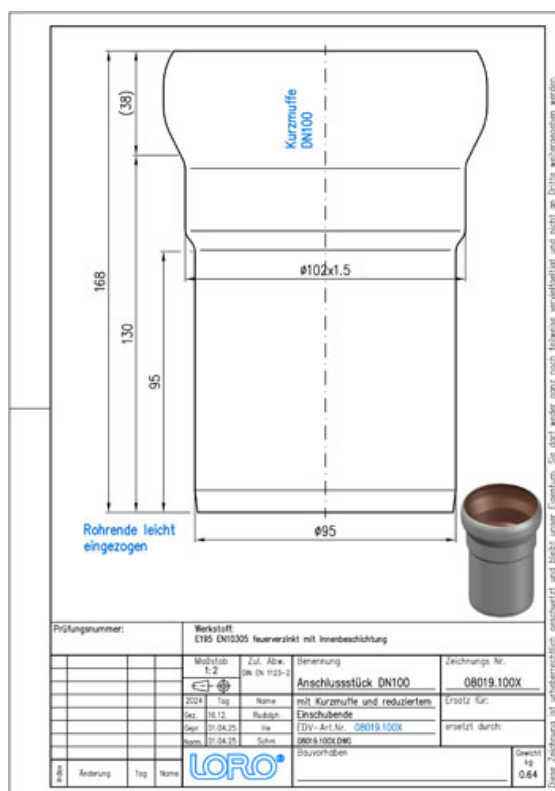

Na stiahnutie



Alles online

[Návod na montáž \(PDF\)](#)

[Certifikát \(PDF\)](#)

[BIM 3D \(IFC\)](#)

[Rozmerový výkres \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Prospekt \(PDF\)](#)

[BIM 3D \(STEP\)](#)