


LX-ANSCHLUSSSTÜCK DN100 M.KURZMUFFE UND

LORO-X connection piece with short socket and reduced insertion end DN 100

Description

LORO-X connector made of steel, hot-dip galvanized, with short socket and reduced insertion end, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, DN100

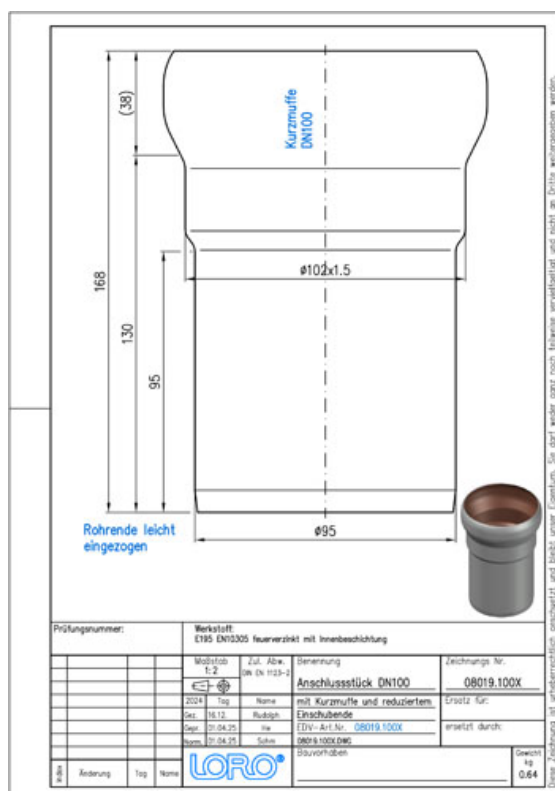

Données de l'article

Code EAN	4038088109250
Classe ETIM	EC011386
Diamètre nominal	DN 100
Dimensions extérieures (HxLxP)	118 x 118 x 155 mm
Poids	0,60 Kg (STK)
Groupe de produits	1
Numéro tarifaire douanier	73063012
Matériau / Couleur	Stahl feuerverzinkt, Silber

Note d'utilisation

kein Verwendungshinweis notwendig

Téléchargements



Alles online

[Notice d'installation \(PDF\)](#)

[Certificat \(PDF\)](#)

[BIM 3D \(IFC\)](#)

[Dessin dimensionnel \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Brochure \(PDF\)](#)

[BIM 3D \(STEP\)](#)