

LX-STAFFELGESCHOSSUMLENKUNG ROHR IN ROHR

LX staggered storey diversion pipe in pipe DN Emergency drain flow direction right 100/50/50

Description

LORO-X Deflection from pipe-in-pipe DN100/50 into double pipe 2 x DN50, for main-emergency combination pipe-in-pipe downpipe, emergency drain right, for LORO-X set-back storey drainage, made of steel, hot-dip galvanized, DN100/50/50




Données de l'article

Code EAN	4038088104354
Classe ETIM	EC003025
Diamètre nominal	DN 100, DN 50, DN 50
Dimensions extérieures (HxLxP)	220 x 200 x 200 mm
Poids	2,80 Kg (STK)
Groupe de produits	9
Numéro tarifaire douanier	73089098
Matériau / Couleur	Stahl feuerverzinkt, Silber

Note d'utilisation

kein Verwendungshinweis notwendig

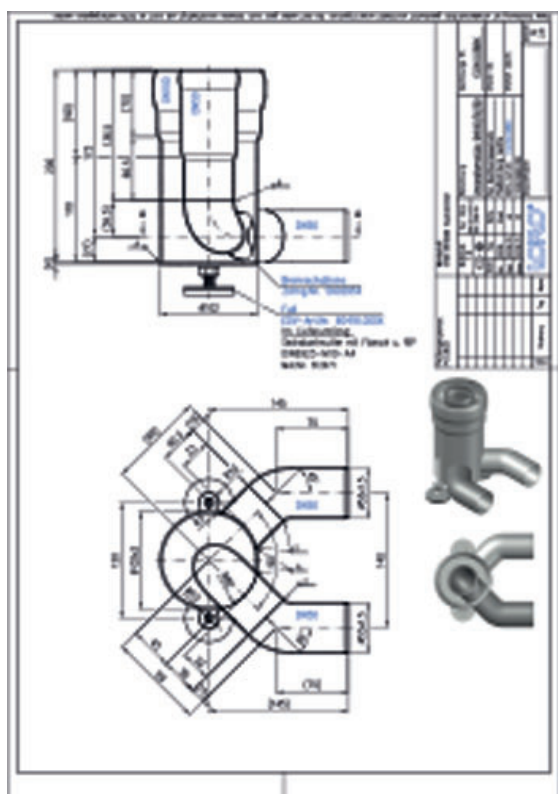

Téléchargements



Alles online

[Notice d'installation \(PDF\)](#)

[Certificat \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Dessin dimensionnel \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Brochure \(PDF\)](#)

[CAD 3D \(DWG\)](#)