


LX UMLENKUNG M.FEST-U.LOSFLANSCH F.KUNST

LORO-X baffle with fixed and loose flange DN 100/50

Popis

LORO-X DUOSTREAM transition from downpipe DN100 into offset via roof terrace DN100/DN 50, for LORO-X cascade drainage, for the installation of the collector pipe within the insulation layer, made of steel, hot-dip galvanized, DN100/50




Údaje o artikli

EAN kód	4038088100752
ETIM trieda	EC003024
Menovitý priemer	DN 100, DN 50
Vonkajšie rozmery (VxŠxH)	200 x 270 x 670 mm
Hmotnosť	6,40 Kg (STK)
Skupina produktov	9
Colný sadzovník	73089098
Materiál / Farba	Stahl feuerverzinkt, Silber

Pokyny na použitie

kein Verwendungshinweis notwendig

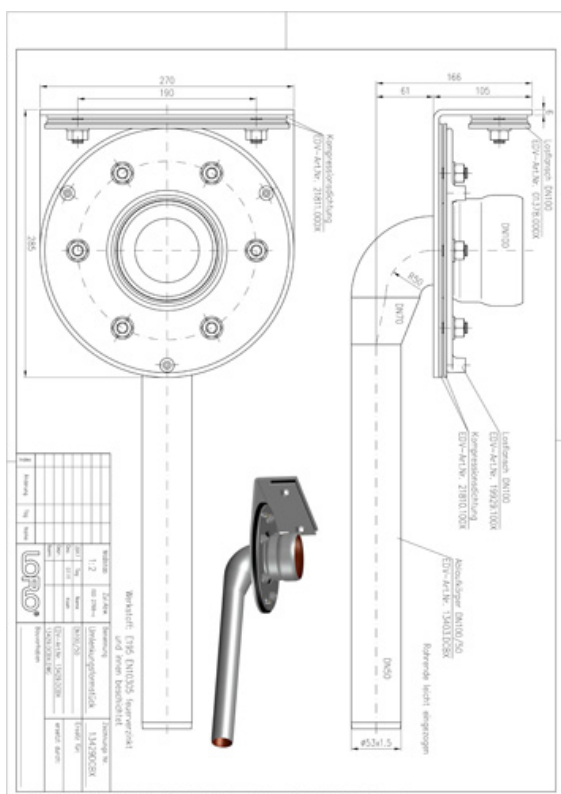

Na stiahnutie



Alles online

[Návod na montáž \(PDF\)](#)

[Certifikát \(PDF\)](#)

CAD 3D (DWG)

[Rozmerový výkres \(PDF\)](#)

Systémový dátový list LX 3012

BIM 3D (STEP)

[Prospekt \(PDF\)](#)

CAD 2D (DXF)

BIM 3D (IFC)