


LX UMLENKUNG M.FEST-U.LOSFLANSCH F.KUNST

LORO-X baffle with fixed and loose flange DN 100/50

Beschrijving

LORO-X DUOSTREAM transition from downpipe DN100 into offset via roof terrace DN100/DN 50, for LORO-X cascade drainage, for the installation of the collector pipe within the insulation layer, made of steel, hot-dip galvanized, DN100/50

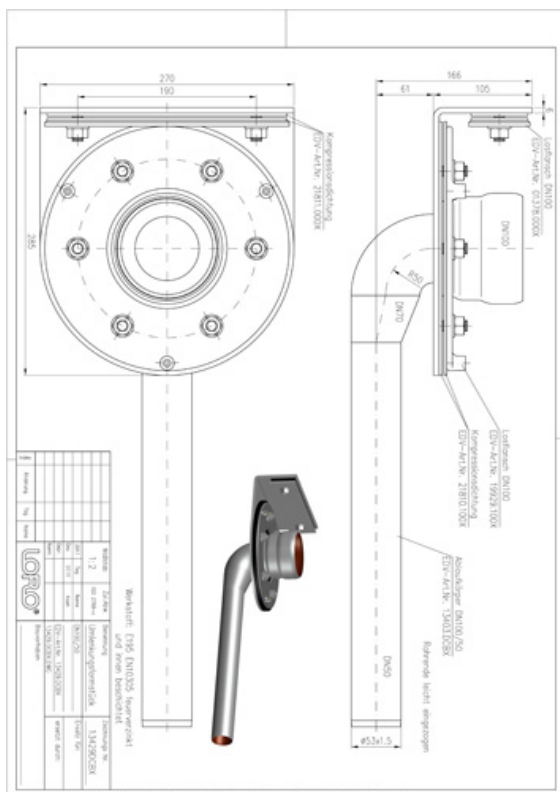

Artikelgegevens

EAN-code	4038088100752
ETIM Klasse	EC003024
Nominale diameter	DN 100, DN 50
Buitenafmetingen (HxBxL)	200 x 270 x 670 mm
Gewicht	6,40 Kg (STK)
Productgroep	9
Douanetariefnumme r	73089098
Materiaal / Kleur	Stahl feuerverzinkt, Silber

Gebruiksaanwijzing

kein Verwendungshinweis notwendig

Downloads



Alles online

[Installatiehandleiding \(PDF\)](#)

[Certificaat \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Maattekening \(PDF\)](#)

[Systeemdatablad LX 3012](#)

[BIM 3D \(STEP\)](#)

[Brochure \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)