

LX UMLENKUNG M.FEST-U.LOSFLANSCH F.KUNST

LORO-X baffle with fixed and loose flange DN 100/50

Beskrivelse

LORO-X DUOSTREAM transition from downpipe DN100 into offset via roof terrace DN100/DN 50, for LORO-X cascade drainage, for the installation of the collector pipe within the insulation layer, made of steel, hot-dip galvanized, DN100/50




Artikkeldata

EAN-kode	4038088100752
ETIM-klasse	EC003024
Nominell diameter	DN 100, DN 50
Utvendige mål (HxBxL)	200 x 270 x 670 mm
Vekt	6,40 Kg (STK)
Produktgruppe	9
Tolltariffnummer	73089098
Materiale / Farge	Stahl feuerverzinkt, Silber

Bruksanvisning

kein Verwendungshinweis notwendig

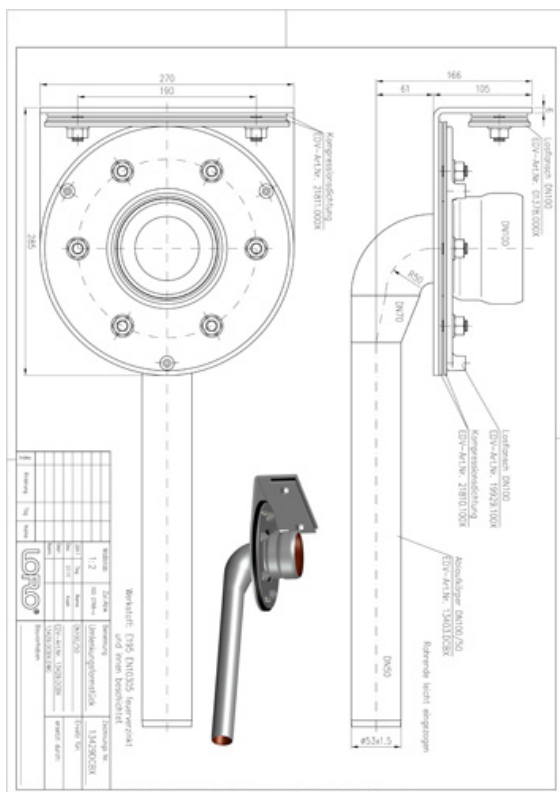

Nedlastinger



Alles online

[Monteringsanvisning \(PDF\)](#)

[Godkjenning \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Måltegning \(PDF\)](#)

[Systemdatablad LX 3012](#)

[BIM 3D \(STEP\)](#)

[Brosjyre \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)