


LX UMLENKUNG M.FEST-U.LOSFLANSCH F.BIT.

LORO-X baffle with fixed and loose flange for bitumen DN 100/50

Beskrivning

LORO-X DUOSTREAM transition from downpipe DN100 into offset via roof terrace DN100/DN 50, 45-degree upstand for bituminous roofing sheets, for LORO-X cascade drainage, for the installation of the collector pipe within the insulation layer, made of steel, hot-dip galvanized, DN100/50

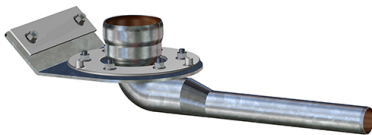


Artikeldata

EAN-kod	4038088105832
ETIM-klass	EC003024
Nominell diameter	DN 100, DN 50
Ytermått (HxBxL)	178 x 270 x 712 mm
Vikt	7,00 Kg (STK)
Produktgrupp	9
Tullnummer	73089098
Material / Färg	Stahl feuerverzinkt, Silber

Användningsanvisning

kein Verwendungshinweis notwendig

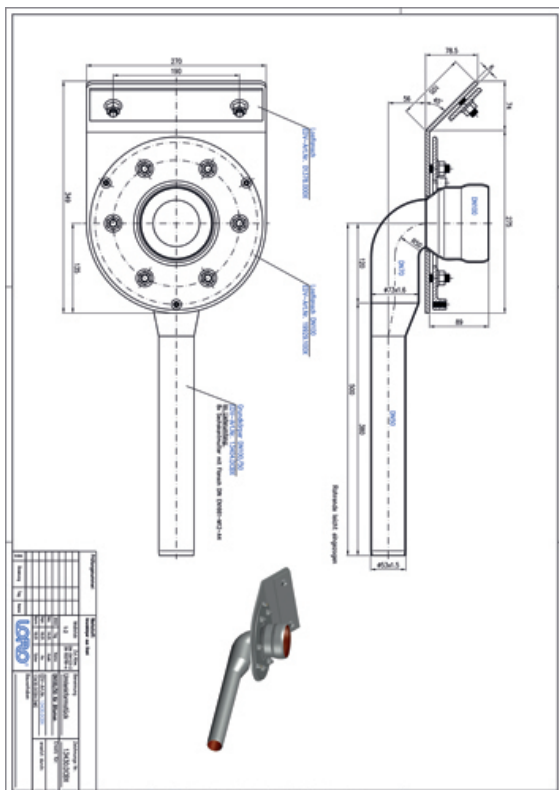

Nedladdningar



Alles online

[Monteringsanvisning \(PDF\)](#)

[Godkännande \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Måttitning \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Broschyr \(PDF\)](#)

[CAD 3D \(DWG\)](#)