


LX UMLENKUNG M.FEST-U.LOSFLANSCH F.BIT.

LORO-X baffle with fixed and loose flange for bitumen DN 100/50

Descriere

LORO-X DUOSTREAM transition from downpipe DN100 into offset via roof terrace DN100/DN 50, 45-degree upstand for bituminous roofing sheets, for LORO-X cascade drainage, for the installation of the collector pipe within the insulation layer, made of steel, hot-dip galvanized, DN100/50

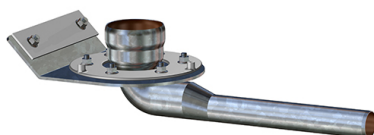


Date articol

Cod EAN	4038088105832
Clasă ETIM	EC003024
Diametru nominal	DN 100, DN 50
Dimensiuni exterioare (ÎxLxA)	178 x 270 x 712 mm
Greutate	7,00 Kg (STK)
Grupă de produse	9
Număr tarif vamal	73089098
Material / Culoare	Stahl feuerverzinkt, Silber

Notă de utilizare

kein Verwendungshinweis notwendig

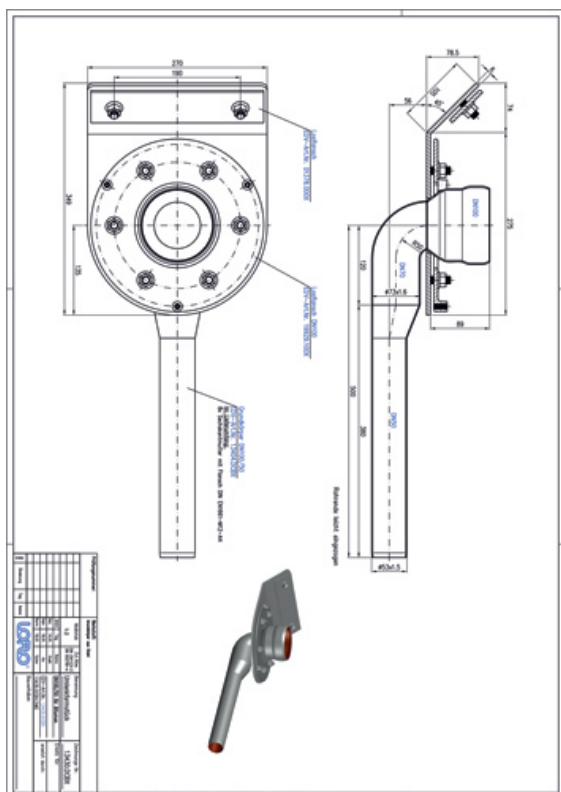

Descărcări



Alles online

[Instrucțiuni de montaj \(PDF\)](#)

[Certificat \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Desen CAD \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Broșură \(PDF\)](#)

[CAD 3D \(DWG\)](#)