
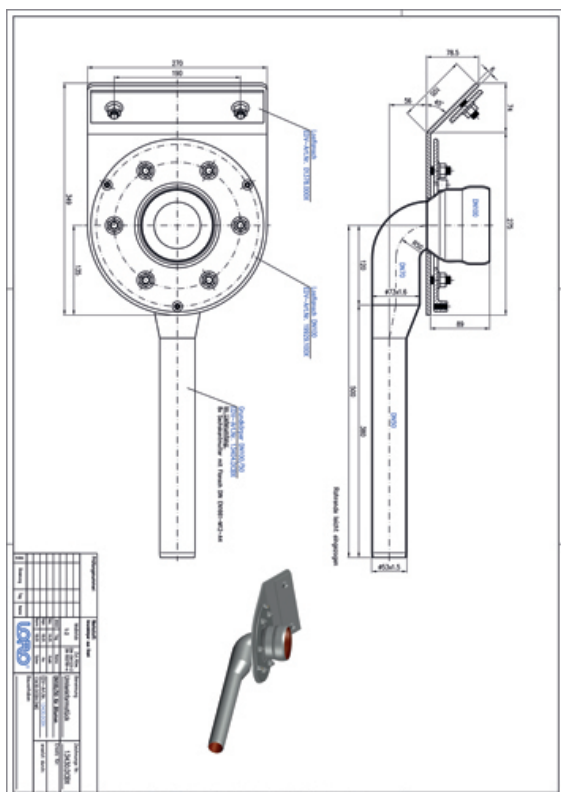


LX UMLENKUNG M.FEST-U.LOSFLANSCH F.BIT.

LORO-X baffle with fixed and loose flange for bitumen DN 100/50

Descrição

LORO-X DUOSTREAM transition from downpipe DN100 into offset via roof terrace DN100/DN 50, 45-degree upstand for bituminous roofing sheets, for LORO-X cascade drainage, for the installation of the collector pipe within the insulation layer, made of steel, hot-dip galvanized, DN100/50

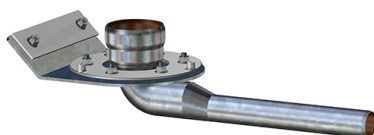

Dados do artigo

Código EAN	4038088105832
Classe ETIM	EC003024
Diâmetro nominal	DN 100, DN 50
Medidas exteriores (AxLxP)	178 x 270 x 712 mm
Peso	7,00 Kg (STK)
Grupo de produtos	9
Número de pauta aduaneira	73089098
Material / Cor	Stahl feuerverzinkt, Silber

Nota de utilização

kein Verwendungshinweis notwendig

Transferências



Alles online

[Instruções de instalação \(PDF\)](#)

[Homologação \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Desenho cotado \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Brochura \(PDF\)](#)

[CAD 3D \(DWG\)](#)