


LX UMLENKUNG M.FEST-U.LOSFLANSCH F.BIT.

LORO-X baffle with fixed and loose flange for bitumen DN 100/50

Beskrivelse

LORO-X DUOSTREAM transition from downpipe DN100 into offset via roof terrace DN100/DN 50, 45-degree upstand for bituminous roofing sheets, for LORO-X cascade drainage, for the installation of the collector pipe within the insulation layer, made of steel, hot-dip galvanized, DN100/50

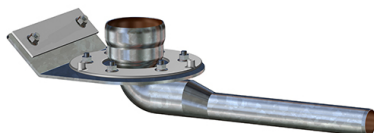


Artikeldata

EAN-kode	4038088105832
ETIM Klasse	EC003024
Nominal diameter	DN 100, DN 50
Ydermål (HxBxL)	178 x 270 x 712 mm
Vægt	7,00 Kg (STK)
Produktgruppe	9
Toldtarifnummer	73089098
Materiale / Farve	Stahl feuerverzinkt, Silber

Brugsanvisning

kein Verwendungshinweis notwendig

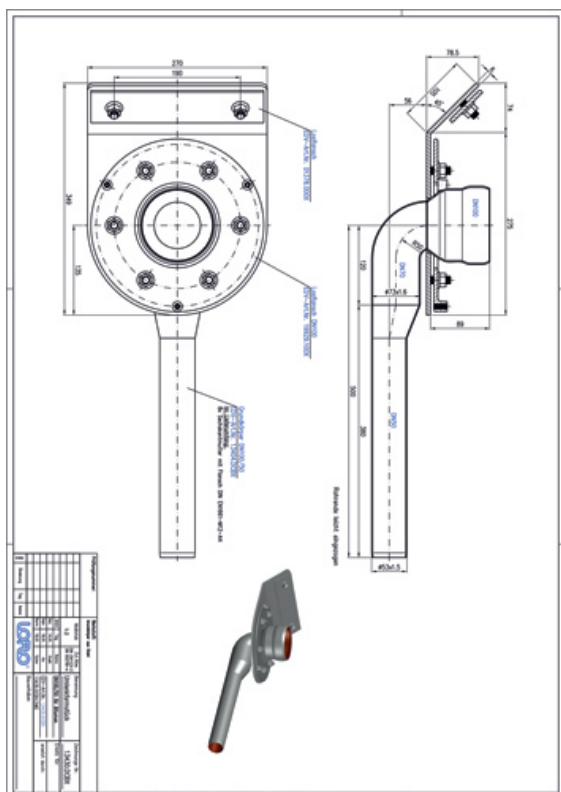

Downloads



Alles online

[Installationsvejledning \(PDF\)](#)

[Certifikat \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Måltegning \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Brochure \(PDF\)](#)

[CAD 3D \(DWG\)](#)