

LX UMLENKUNG M.FEST-U.LOSFLANSCH F.BIT.

LORO-X baffle with fixed and loose flange for bitumen DN 100/50

Voce di capitolato

LORO-X DUOSTREAM transition from downpipe DN100 into offset via roof terrace DN100/DN 50, 45-degree upstand for bituminous roofing sheets, for LORO-X cascade drainage, for the installation of the collector pipe within the insulation layer, made of steel, hot-dip galvanized, DN100/50

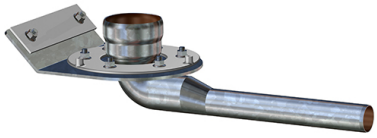

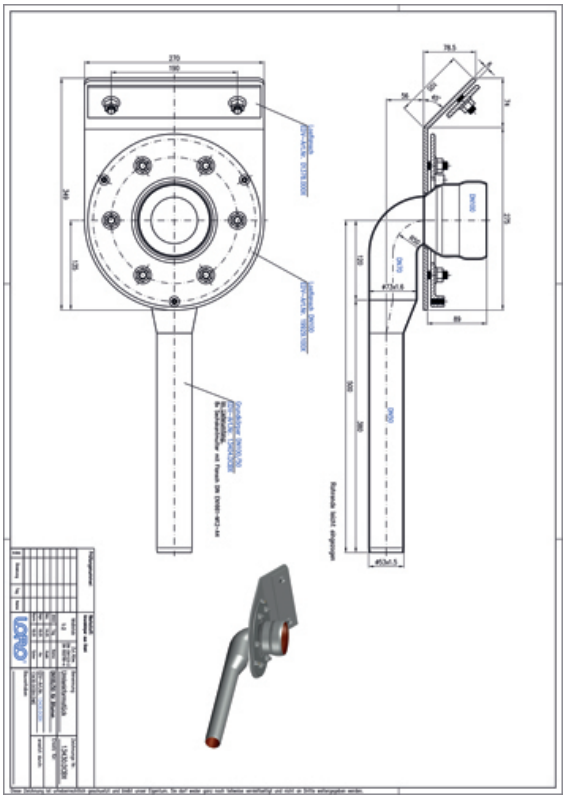

Dati articolo

Codice EAN	**4038088105832**
Classe ETIM	**EC003024**
Diametro nominale	**DN 100, DN 50**
Misure esterne (AxLxP)	**178 x 270 x 712 mm**
Peso	**7,00 Kg (STK)**
Gruppo prodotti	**9**
Numero tariffa doganale	**73089098**
Materiale / Colore	**Stahl feuerverzinkt, Silber**

Note d'uso

kein Verwendungshinweis notwendig

Download

Alles online

Istruzioni di installazione (PDF)
Certificato (PDF)
BIM 3D (STEP)
Disegno dimensionale (PDF)
CAD 2D (DXF)
BIM 3D (IFC)
Brochure (PDF)
CAD 3D (DWG)