

LX UMLENKUNG M.FEST-U.LOSFLANSCH F.BIT.

LORO-X baffle with fixed and loose flange for bitumen DN 100/50

Texte de prescription

LORO-X DUOSTREAM transition from downpipe DN100 into offset via roof terrace DN100/DN 50, 45-degree upstand for bituminous roofing sheets, for LORO-X cascade drainage, for the installation of the collector pipe within the insulation layer, made of steel, hot-dip galvanized, DN100/50

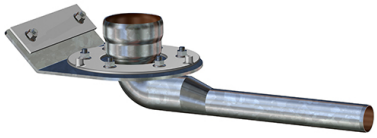

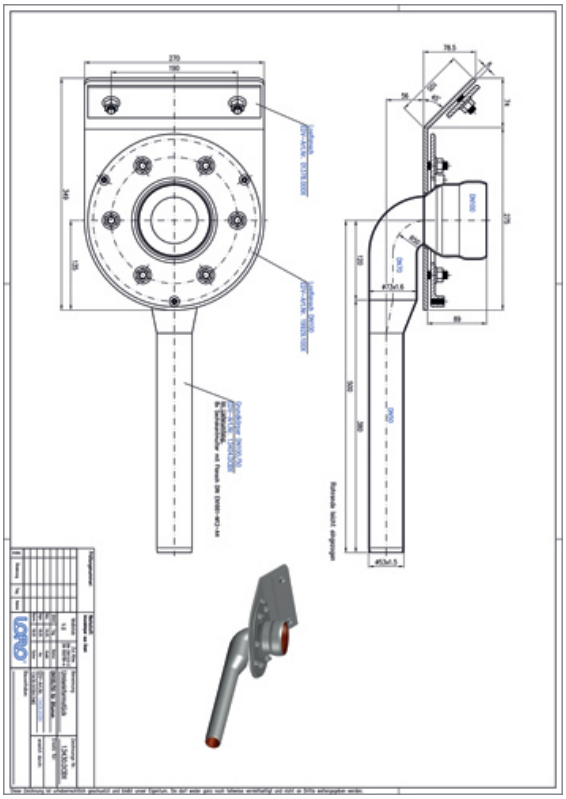

Données de l'article

Code EAN	**4038088105832**
Classe ETIM	**EC003024**
Diamètre nominal	**DN 100, DN 50**
Dimensions extérieures (HxLxP)	**178 x 270 x 712 mm**
Poids	**7,00 Kg (STK)**
Groupe de produits	**9**
Numéro tarifaire douanier	**73089098**
Matériau / Couleur	**Stahl feuerverzinkt, Silber**

Note d'utilisation

kein Verwendungshinweis notwendig

Téléchargements

Alles online

Notice d'installation (PDF)
Certificat (PDF)
BIM 3D (STEP)
Dessin dimensionnel (PDF)
CAD 2D (DXF)
BIM 3D (IFC)
Brochure (PDF)
CAD 3D (DWG)