


LX KASKADENDURCHF.SR.43,RIR,HPT.,FRSP.,

LORO-X cascade duct for pipe in pipe with adhesive flange for bitumen DN 100/50

Opis

LORO-X DUOSTREAM cascade drainage main drain for roof terraces, series 43, Attika-Direct, pipe-in-pipe, for main drainage with gravity flow, discharge rate 2.0 l/sec with a water height of 35 mm on the roof terrace, with bonding flange, 45-degree for bitumen roofing sheets, proof of performance according to specification sheet LX1981, made of stainless steel, DN100/50

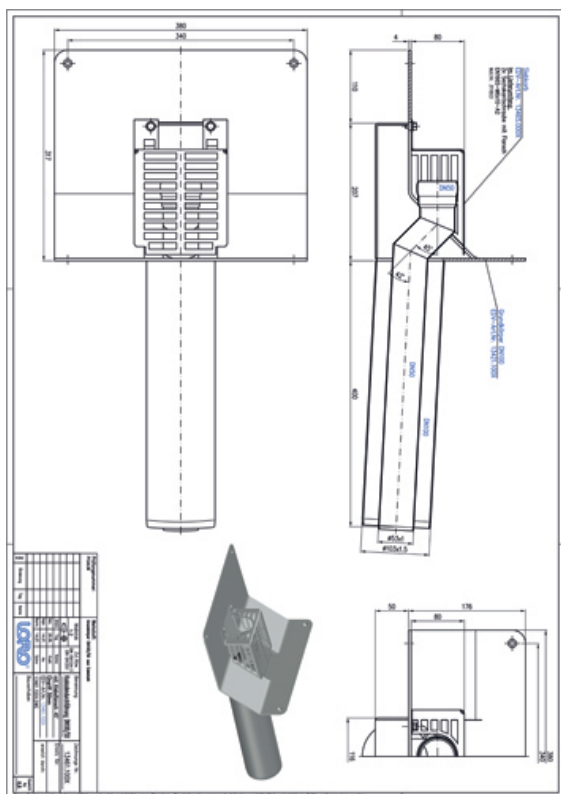

Dane artykułu

Kod EAN	4038088102152
Klasa ETIM	EC011350
Średnica nominalna	DN 100, DN 50
Wymiary zewnętrzne (WxSxD)	380 x 735 x 270 mm
Waga	8,80 Kg (STK)
Grupa produktów	9
Numer taryfy celnej	73072980
Materiał / Kolor	Edelstahl, Silber

Wskazówki dotyczące użytkowania

kein Verwendungshinweis notwendig

Pobieranie



Alles online

[Instrukcja montażu \(PDF\)](#)
[Karta danych systemu LX 1981](#)
[BIM 3D \(STEP\)](#)

[Rysunek wymiarowy \(PDF\)](#)
[CAD 2D \(DXF\)](#)
[BIM 3D \(IFC\)](#)

[Broszura \(PDF\)](#)
[CAD 3D \(DWG\)](#)