
## LX KASKADENDURCHF.SR.43,RIR,HPT.,FRSP.,

**LORO-X cascade duct for pipe in pipe with adhesive flange for bitumen DN 100/50**

### Voce di capitolato

LORO-X DUOSTREAM cascade drainage main drain for roof terraces, series 43, Attika-Direct, pipe-in-pipe, for main drainage with gravity flow, discharge rate 2.0 l/sec with a water height of 35 mm on the roof terrace, with bonding flange, 45-degree for bitumen roofing sheets, proof of performance according to specification sheet LX1981, made of stainless steel, DN100/50



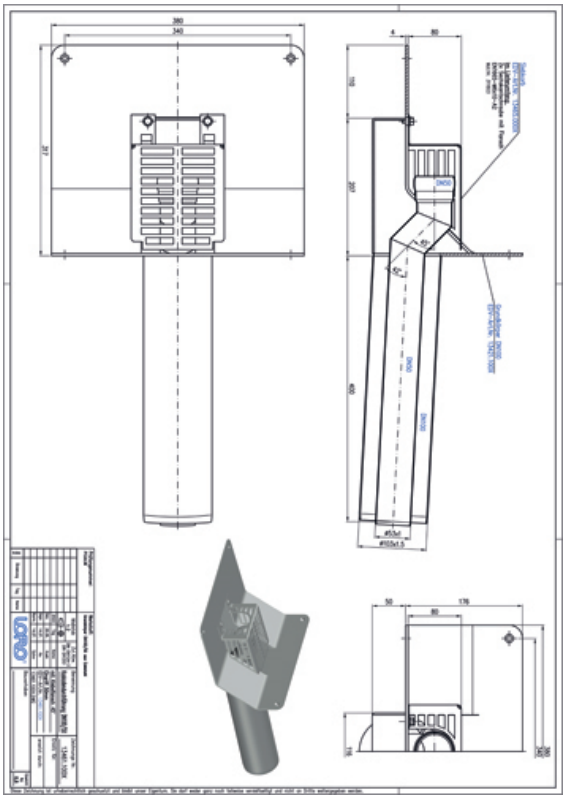

### Dati articolo

| | |
|---|---|
| Codice EAN | **4038088102152** |
| Classe ETIM | **EC011350** |
| Diametro nominale | **DN 100, DN 50** |
| Misure esterne (AxLxP) | **380 x 735 x 270 mm** |
| Peso | **8,80 Kg (STK)** |
| Gruppo prodotti | **9** |
| Numero tariffa doganale | **73072980** |
| Materiale / Colore | **Edelstahl, Silber** |

### Note d'uso

kein Verwendungshinweis notwendig

### Download

Alles online

Istruzioni di installazione (PDF)
Scheda tecnica del sistema LX 1981
BIM 3D (STEP)
Disegno dimensionale (PDF)
CAD 2D (DXF)
BIM 3D (IFC)
Brochure (PDF)
CAD 3D (DWG)