


## LX KASKADENDURCHF.SR.43,RIR,HPT.,FRSP.,

LORO-X cascade duct for pipe in pipe with adhesive flange for bitumen DN 100/50

### Description

LORO-X DUOSTREAM cascade drainage main drain for roof terraces, series 43, Attika-Direct, pipe-in-pipe, for main drainage with gravity flow, discharge rate 2.0 l/sec with a water height of 35 mm on the roof terrace, with bonding flange, 45-degree for bitumen roofing sheets, proof of performance according to specification sheet LX1981, made of stainless steel, DN100/50

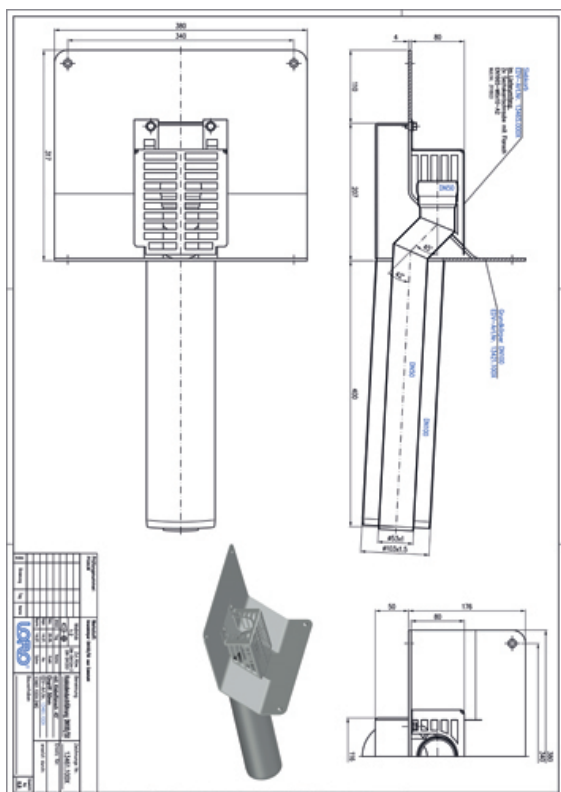

### Données de l'article

|                                |                    |
|--------------------------------|--------------------|
| Code EAN                       | 4038088102152      |
| Classe ETIM                    | EC011350           |
| Diamètre nominal               | DN 100, DN 50      |
| Dimensions extérieures (HxLxP) | 380 x 735 x 270 mm |
| Poids                          | 8,80 Kg (STK)      |
| Groupe de produits             | 9                  |
| Numéro tarifaire douanier      | 73072980           |
| Matériau / Couleur             | Edelstahl, Silber  |

### Note d'utilisation

kein Verwendungshinweis notwendig

### Téléchargements



Alles online

[Notice d'installation \(PDF\)](#)

[Fiche technique du système LX 1981](#)

[BIM 3D \(STEP\)](#)

[Dessin dimensionnel \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Brochure \(PDF\)](#)

[CAD 3D \(DWG\)](#)