


LX KASKADENDURCHF.SR.43,RIR,HPT.,FRSP.,

LORO-X cascade penetration, Series 43, for pipe-in-pipe main drainage, free-flowing, with clamping flange for plastic roof sealing membranes DN 100/50

Kuvaus

LORO-X DUOSTREAM cascade drainage main drain for roof terraces, series 43, Attika-Direct, pipe-in-pipe, for main drainage with gravity flow, discharge rate 2.0 l/sec with a water height of 35 mm on the roof terrace, with clamping flange, 90-degree for plastic roofing sheets, proof of performance according to specification sheet LX1981, made of stainless steel, DN100/50

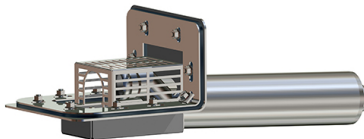


Tuotetiedot

EAN-koodi	4038088106334
ETIM-luokka	EC004949
Nimellishalkaisija	DN 100, DN 50
Ulkomitat (KxLxS)	247 x 280 x 694 mm
Paino	8,80 Kg (STK)
Tuoteryhmä	9
Tullitariffin numero	73072980
Materiaali / Väri	Edelstahl, Silber

Käyttöohje

kein Verwendungshinweis notwendig

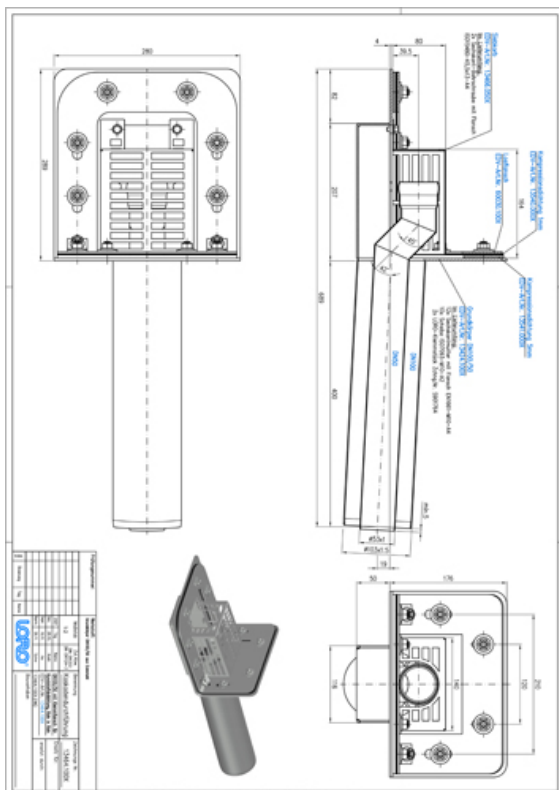

Lataukset



Alles online

[Mittapiirustus \(PDF\)](#)

[Järjestelmän datalehti LX 1981](#)

[BIM 3D \(STEP\)](#)

[Esite \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Hyväksyntä \(PDF\)](#)

[CAD 3D \(DWG\)](#)