


LX KASKADENDURCHF.SR.43,RIR,HPT.,FRSP.,

LORO-X cascade penetration, Series 43, for pipe-in-pipe main drainage, free-flowing, with clamping flange for plastic roof sealing membranes DN 100/50

Opis

LORO-X DUOSTREAM cascade drainage main drain for roof terraces, series 43, Attika-Direct, pipe-in-pipe, for main drainage with gravity flow, discharge rate 2.0 l/sec with a water height of 35 mm on the roof terrace, with clamping flange, 90-degree for plastic roofing sheets, proof of performance according to specification sheet LX1981, made of stainless steel, DN100/50

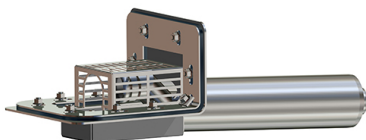


Podaci o artiklu

EAN kod	4038088106334
ETIM klasa	EC004949
Nazivni promjer	DN 100, DN 50
Vanjske mjere (VxŠxD)	247 x 280 x 694 mm
Težina	8,80 Kg (STK)
Grupa proizvoda	9
Carinski tarifni broj	73072980
Materijal / Boja	Edelstahl, Silber

Napomena za upotrebu

kein Verwendungshinweis notwendig

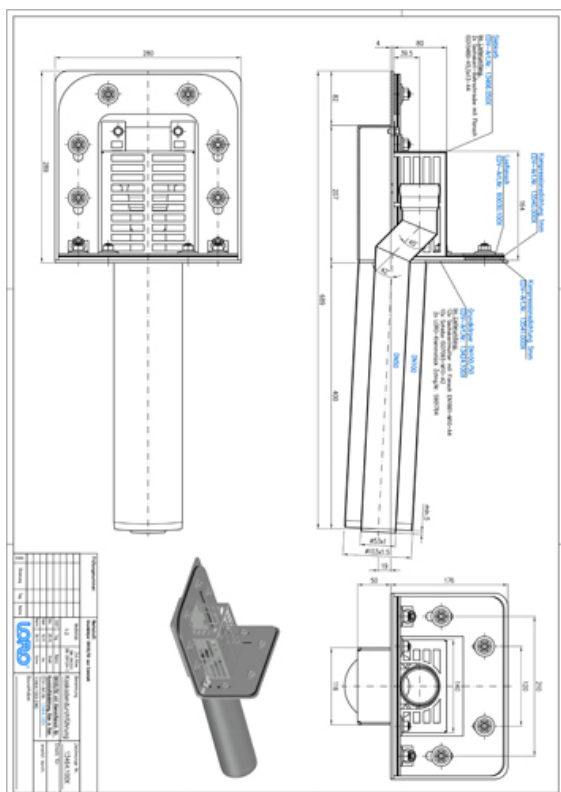

Preuzimanja



Alles online

[Dimenzijski crtež \(PDF\)](#)
[Tehnički list sustava LX 1981](#)
[BIM 3D \(STEP\)](#)

[Prospekt \(PDF\)](#)
[CAD 2D \(DXF\)](#)
[BIM 3D \(IFC\)](#)

[Certifikat \(PDF\)](#)
[CAD 3D \(DWG\)](#)