
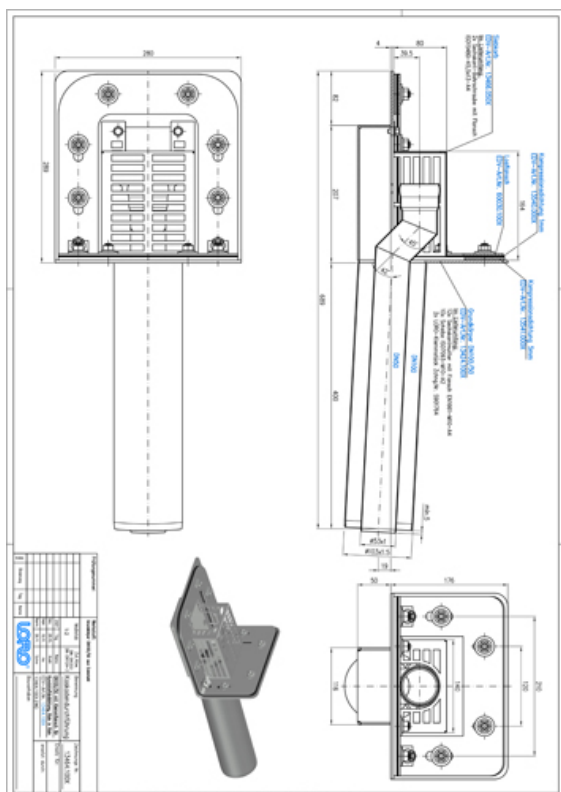


LX KASKADENDURCHF.SR.43,RIR,HPT.,FRSP.,

LORO-X cascade penetration, Series 43, for pipe-in-pipe main drainage, free-flowing, with clamping flange for plastic roof sealing membranes DN 100/50

Descrizione

LORO-X DUOSTREAM cascade drainage main drain for roof terraces, series 43, Attika-Direct, pipe-in-pipe, for main drainage with gravity flow, discharge rate 2.0 l/sec with a water height of 35 mm on the roof terrace, with clamping flange, 90-degree for plastic roofing sheets, proof of performance according to specification sheet LX1981, made of stainless steel, DN100/50

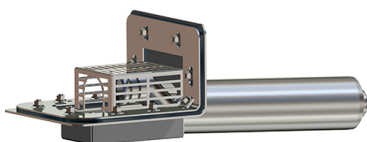

Dati articolo

Codice EAN	4038088106334
Classe ETIM	EC004949
Diametro nominale	DN 100, DN 50
Misure esterne (AxLxP)	247 x 280 x 694 mm
Peso	8,80 Kg (STK)
Gruppo prodotti	9
Numero tariffa doganale	73072980
Materiale / Colore	Edelstahl, Silber

Note d'uso

kein Verwendungshinweis notwendig

Download



Alles online

[Disegno dimensionale \(PDF\)](#)

[Scheda tecnica del sistema LX 1981](#)

[BIM 3D \(STEP\)](#)

[Brochure \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Certificato \(PDF\)](#)

[CAD 3D \(DWG\)](#)