


## LX KASKADENDURCHF.SR.43,RIR,HPT.,FRSP.,

LORO-X cascade penetration, Series 43, for pipe-in-pipe main drainage, free-flowing, with clamping flange for plastic roof sealing membranes DN 100/50

### Descripción

LORO-X DUOSTREAM cascade drainage main drain for roof terraces, series 43, Attika-Direct, pipe-in-pipe, for main drainage with gravity flow, discharge rate 2.0 l/sec with a water height of 35 mm on the roof terrace, with clamping flange, 90-degree for plastic roofing sheets, proof of performance according to specification sheet LX1981, made of stainless steel, DN100/50

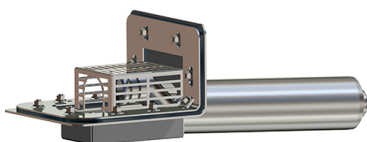


### Datos del artículo

|                            |                    |
|----------------------------|--------------------|
| Código EAN                 | 4038088106334      |
| Clase ETIM                 | EC004949           |
| Diámetro nominal           | DN 100, DN 50      |
| Medidas exteriores (AxAxL) | 247 x 280 x 694 mm |
| Peso                       | 8,80 Kg (STK)      |
| Grupo de productos         | 9                  |
| Número de arancel aduanero | 73072980           |
| Material / Color           | Edelstahl, Silber  |

### Nota de uso

kein Verwendungshinweis notwendig

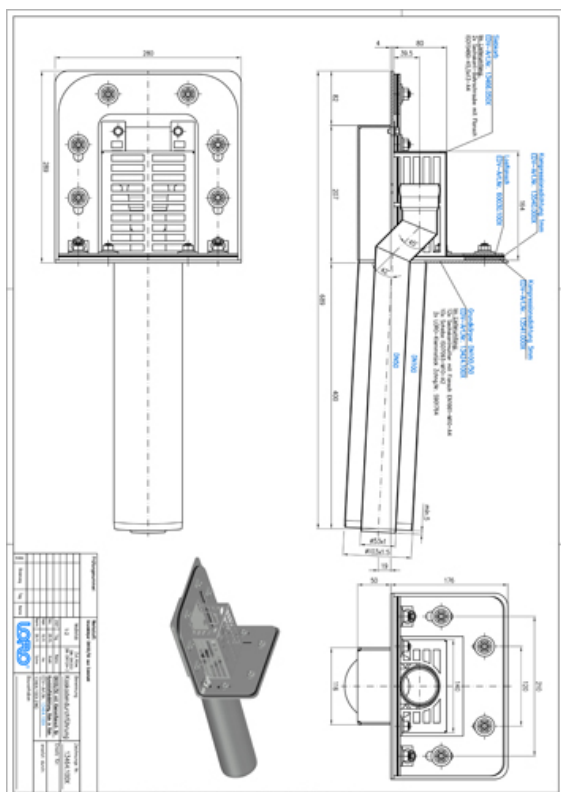

### Descargas



Alles online

[Dibujo dimensional \(PDF\)](#)

[Ficha técnica del sistema LX 1981](#)

[BIM 3D \(STEP\)](#)

[Folleto \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Certificado \(PDF\)](#)

[CAD 3D \(DWG\)](#)