

LX KASKADENDURCHF.SR.43,RIR,HPT.,FRSP.,

LORO-X cascade penetration, Series 43, for pipe-in-pipe main drainage, free-flowing, with clamping flange for plastic roof sealing membranes DN 100/50

Texte de prescription

LORO-X DUOSTREAM cascade drainage main drain for roof terraces, series 43, Attika-Direct, pipe-in-pipe, for main drainage with gravity flow, discharge rate 2.0 l/sec with a water height of 35 mm on the roof terrace, with clamping flange, 90-degree for plastic roofing sheets, proof of performance according to specification sheet LX1981, made of stainless steel, DN100/50

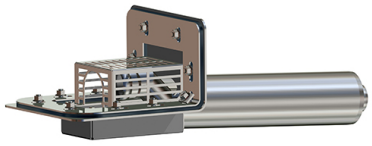

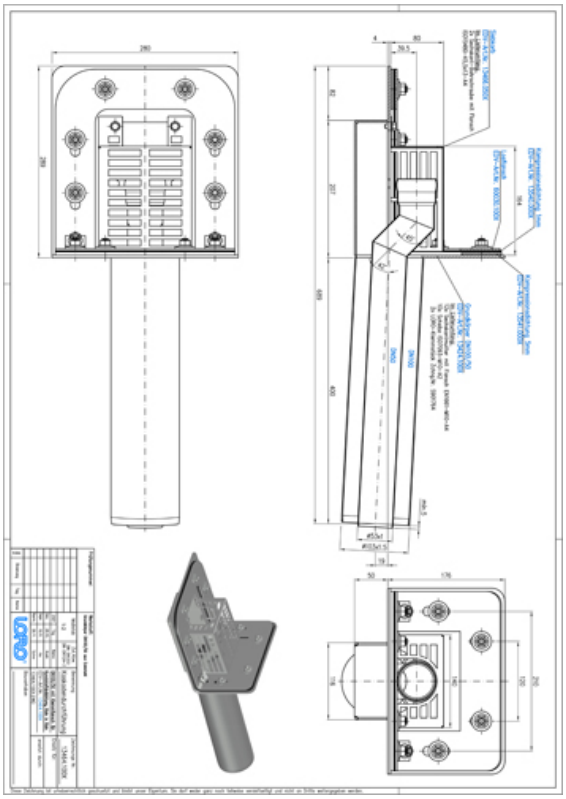

Données de l'article

Code EAN	4038088106334
Classe ETIM	EC004949
Diamètre nominal	DN 100, DN 50
Dimensions extérieures (HxLxP)	247 x 280 x 694 mm
Poids	8,80 Kg (STK)
Groupe de produits	9
Numéro tarifaire douanier	73072980
Matériau / Couleur	Edelstahl, Silber

Note d'utilisation

kein Verwendungshinweis notwendig

Téléchargements

Alles online

Dessin dimensionnel (PDF)
Fiche technique du système LX 1981
BIM 3D (STEP)
Brochure (PDF)
CAD 2D (DXF)
BIM 3D (IFC)
Certificat (PDF)
CAD 3D (DWG)