
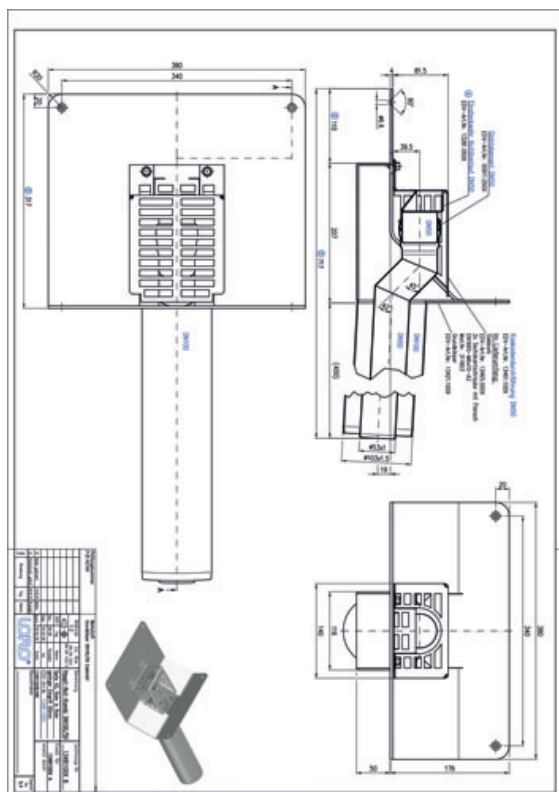


LX-ATTIKAABLAUF SR.43 RIR HPT/NOT KOMBI

LORO-X Attika Series 43 for main-emergency-combi pipe in pipe free-standing entry depth 50 mm with adhesive flange DN 100/50

Popis

LORO-X main-emergency combination DUOFLUX flat50 direct parapet drain, series 43, Attika-Direct, pipe-in-pipe, for main drainage with gravity flow, discharge rate 2.0 l/sec with a water height of 35 mm on the roof terrace and emergency drainage 2.1 l/sec at 75 mm, with bonding flange, 45-degree for bitumen roofing sheets, roof penetration depth 50 mm, proof of performance according to specification sheet LX2074, made of stainless steel, DN100/50

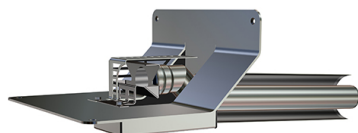

Údaje o artikli

EAN kód	4038088105603
ETIM trieda	EC010400
Menovitý priemer	DN 100
Vonkajšie rozmery (VxŠxH)	246 x 380 x 535 mm
Hmotnosť	9,40 Kg (STK)
Skupina produktov	9
Colný sadzobník	73072980
Materiál / Farba	Edelstahl, Silber

Pokyny na použitie

kein Verwendungshinweis notwendig

Na stiahnutie



Alles online

[Rozmerový výkres \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Systémový dátový list LX 2074](#)

[BIM 3D \(STEP\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)