

LORO-X SCUPPER DRAINAGE FOR MAIN EMERGENCYCOMBINATION, SERIES 101, WITH CLAMPING FLANGE FOR BITUMINOUS + PLASTIC ROOFING

LORO-RAINSTAR Main-Emergency-Combi Drain Main drain DN 100 Free-flowing drain Emergency drain DN 50 Pressure flow

Opis

LORO-X main-emergency combination parapet drain, series 88 pipe-in-pipe, for main drainage with gravity flow, discharge rate 4.5 l/s at 35 mm water level on the roof and emergency drainage with siphonic flow 8.2 l/s at 75 mm, with clamping flange, as loose and fixed flange construction, without upstand for bituminous and plastic roofing sheets, penetration depth 106 mm, with main-emergency combination cover made of stainless steel, according to DIN EN 1253, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe according to system data sheet LX772, made of steel, hot-dip galvanized, DN100/50




Podaci o artiklu

EAN kod	4038088082935
ETIM klasa	EC010400
Nazivni promjer	DN 100
Vanjske mjere (VxŠxD)	275 x 378 x 241 mm
Težina	7,00 Kg (STK)
Grupa proizvoda	9
Carinski tarifni broj	73089098
Materijal / Boja	Stahl feuerverzinkt, Silber

Napomena za upotrebu

LORO-X Haupt-Not-Kombi ist das Stichwort für die von LORO zum Patent angemeldete innovative Rohr-in-Rohr Lösung. Durch das patentierte Rohr-in-Rohr Prinzip von LORO ist es möglich, ein unabhängiges zweites Entwässerungssystem innerhalb nur einer einzigen sichtbaren Falleitung unterzubringen. Das LORO-X Modell Haupt-Not-Kombi Rohr-in-Rohr kombiniert eine Silent-Freispiegel-Hauptentwässerung (4,5 l/s bei 35 mm Wasserhöhe) mit einer zusätzlichen Silent-Power-Notentwässerung (8,2 l/s bei 75 mm Wasserhöhe) in einem einzigen System.

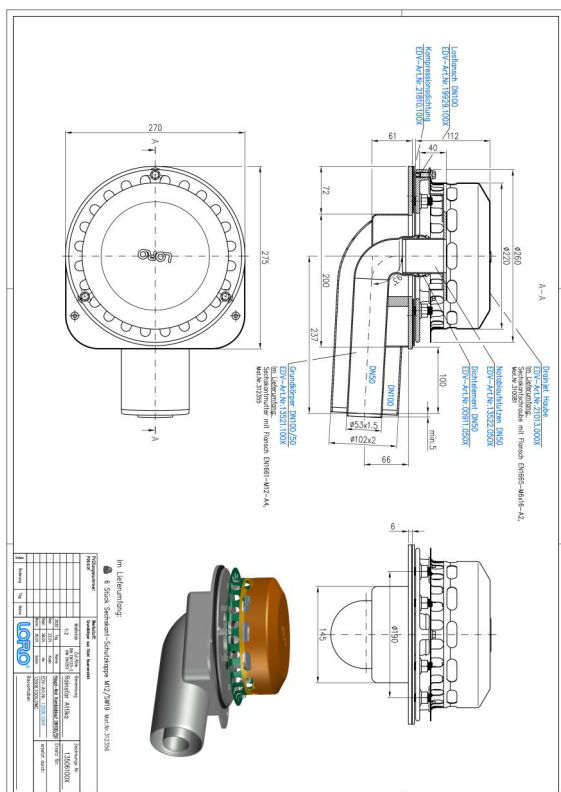

Preuzimanja



Alles online

[Upute za ugradnju \(PDF\)](#)

[Certifikat \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Dimenzijski crtež \(PDF\)](#)

[Tehnički list sustava LX 772](#)

[BIM 3D \(STEP\)](#)

[Prospekt \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)