

LORO-X SCUPPER DRAINAGE FOR MAIN EMERGENCYCOMBINATION, SERIES 101, WITH CLAMPING FLANGE FOR BITUMINOUS + PLASTIC ROOFING

LORO-RAINSTAR Main-Emergency-Combi Drain Main drain DN 100 Free-flowing drain Emergency drain DN 50 Pressure flow

Beskrivelse

LORO-X main-emergency combination parapet drain, series 88 pipe-in-pipe, for main drainage with gravity flow, discharge rate 4.5 l/s at 35 mm water level on the roof and emergency drainage with siphonic flow 8.2 l/s at 75 mm, with clamping flange, as loose and fixed flange construction, without upstand for bituminous and plastic roofing sheets, penetration depth 106 mm, with main-emergency combination cover made of stainless steel, according to DIN EN 1253, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe according to system data sheet LX772, made of steel, hot-dip galvanized, DN100/50




Artikkeldata

EAN-kode	4038088082935
ETIM-klasse	EC010400
Nominell diameter	DN 100
Utvendige mål (HxBxL)	275 x 378 x 241 mm
Vekt	7,00 Kg (STK)
Produktgruppe	9
Tolltariffnummer	73089098
Materiale / Farge	Stahl feuerverzinkt, Silber

Bruksanvisning

LORO-X Haupt-Not-Kombi ist das Stichwort für die von LORO zum Patent angemeldete innovative Rohr-in-Rohr Lösung. Durch das patentierte Rohr-in-Rohr Prinzip von LORO ist es möglich, ein unabhängiges zweites Entwässerungssystem innerhalb nur einer einzigen sichtbaren Falleitung unterzubringen. Das LORO-X Modell Haupt-Not-Kombi Rohr-in-Rohr kombiniert eine Silent-Freispiegel-Hauptentwässerung (4,5 l/s bei 35 mm Wasserhöhe) mit einer zusätzlichen Silent-Power-Notentwässerung (8,2 l/s bei 75 mm Wasserhöhe) in einem einzigen System.

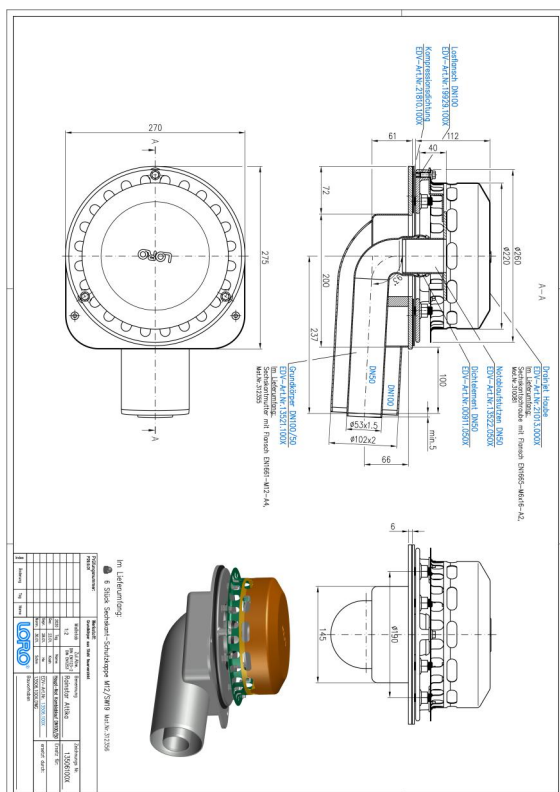

Nedlastinger



Alles online

[Monteringsanvisning \(PDF\)](#)
[Godkjenning \(PDF\)](#)
[CAD 3D \(DWG\)](#)
[Måltegning \(PDF\)](#)
[Systemdatablad LX 772](#)
[BIM 3D \(STEP\)](#)
[Brosjyre \(PDF\)](#)
[CAD 2D \(DXF\)](#)
[BIM 3D \(IFC\)](#)