LX-GEDATI ATTIKA NOTABL.M.WEHR 60MM O.

LORO-RAINSTAR high performance steel parapet emergency drain without upstand with clamping flange pressure outlet DN 100

Beskrivelse

LORO-X RAINSTAR High performance siphonic parapet drain, series 88 without upstand, for emergency drainage with siphonic flow, discharge rate 37.0 l/s at 75 mm water level on the roof, weir height 60 mm, with clamping flange, as loose and fixed flange construction, without upstand for bituminous and plastic roofing sheets, roof penetration depth 106 mm, with DRAINJET hood made of stainless steel, according to DIN EN 1253, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe according to system data sheet LX2331, made of steel, hot-dip galvanized, DN100

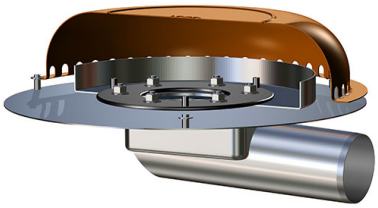

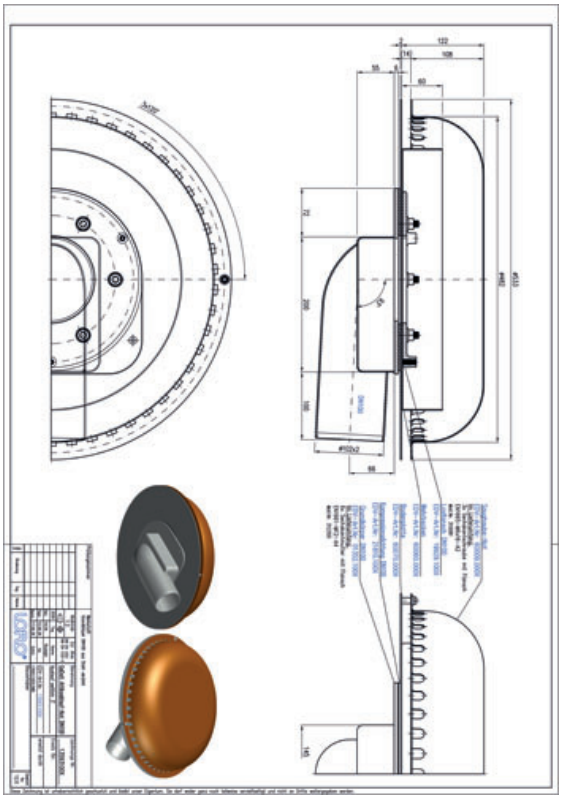

Artikeldata

EAN-kode	4038088110515
ETIM Klasse	EC011350
Nominel diameter	DN 100
Ydermål (HxBxL)	250 x 533 x 533 mm
Vægt	12,00 Kg (STK)
Produktgruppe	9
Toldtarifnummer	73072980
Materiale / Farve	Stahl feuerverzinkt, Silber

Brugsanvisning

LORO-X RAINSTAR-Distant Attikaentwässerung ohne Aufkantung ermöglicht den Einbau des Ablaufes in variablem Abstand zur Attika. So ist es möglich die Dachschräge zur Attika wieder ansteigen zu lassen und den tiefsten Punkt weiter zur Dachmitte zu verlagern. Die Verlegung des waagerechten Rohres kann z.B. innerhalb der Wärmedämmung erfolgen.Die Abdichtung erfolgt nur in einer Ebene mit LORO-Klemmflansch. Die Silent-Power Druckströmung in Kombination mit der patentierten 2-stufigen Beschleunigung des Wassers im Ablauf sorgt für starke Abflussleistung von bis zu 21 l/s.Zu beachten ist jedoch, dass ein zu großer Abstand zur Attika die Abflussleistung beeinträchtigen kann.Vorteile: -Variable Entfernung zur Attika -bis 21,7 l/s bei Notentwässerung mit Druckströmung bei 75mm -hohe Abflussleistung durch patentiertes, tiefergelegtes Rohr -nur eine horizontale Abdichtungsebene -patentiertes Notentwässerungswehr unter der Haube

Downloads

Alles online

- Installationsvejledning (PDF)
- Certifikat (PDF)
- BIM 3D (STEP)
- Måltegning (PDF)
- CAD 2D (DXF)
- BIM 3D (IFC)
- Brochure (PDF)
- CAD 3D (DWG)