LORO-ATTIKA-ABL.FREISP.F.UMKEHRD.M.KLEMM

LORO-Attika drain free-standing mirror installation inverted roof with clamping flange for bitumen screening unit 495 mm DN 70

Description

LORO - RAINSTAR parapet drain for inverted roof, for gravity flow, according to DIN EN 1253, with 45 clamping flange, as loose and fixed flange construction, for bituminous roofing sheets, made of stainless steel and strainer unit for inverted roof, for installation height 495 mm, consisting of strainer basket and strainer cover, made of stainless steel, DN70



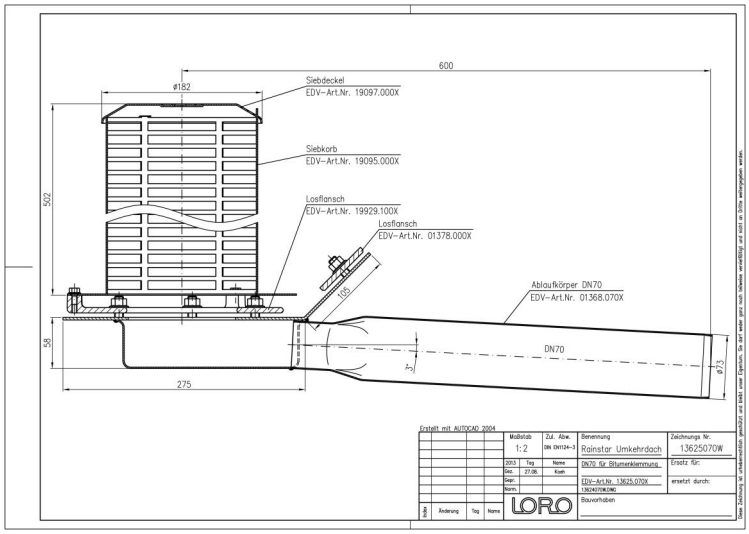

Données de l'article

Code EAN	4038088093894
Classe ETIM	EC011350
Diamètre nominal	DN 70
Dimensions extérieures (HxLxP)	270 x 737 x 334 mm
Poids	6,80 Kg (STK)
Groupe de produits	9
Numéro tarifaire douanier	73072980
Matériau / Couleur	Edelstahl, Silber

Note d'utilisation

LORO-X Serie 89 Attikaentwässerung mit hohem Siebkorb - und zusätzlich höhenvariablem Wehr bei der Notentwässerung eignet sich insbesondere für Umkehrdächer. Die unter der Wärmedämmung liegende Abdichtungsbahn wird in den unten angeordneten Ablaufkörper eingeklemmt. Die Höhe des Siebkorbes - und bei der Notentwässerung die Höhe des höhenvariablen Wehres - richtet sich nach der Höhe der Wärmedämmung und der darüber liegenden Bekiesung.

Téléchargements

Notice d'installation (PDF)
Dessin dimensionnel (PDF)
Brochure (PDF)
Certificat (PDF)
CAD 2D (DXF)
CAD 3D (DWG)
BIM 3D (STEP)
BIM 3D (IFC)

Alles online