LX-RAINSTAR 88 ATTIKA NOTABL.M.WEHR 40MM

LORO-RAINSTAR high performance stainless steel parapet emergency drain with weir height 40 mm without upstand with clamping flange pressure outlet DN 100

Beskrivelsestekst

LORO-X RAINSTAR High performance siphonic parapet drain, series 88 without upstand, for emergency drainage with siphonic flow, discharge rate 37.0 l/s at 75 mm water level on the roof, weir height 40 mm, with clamping flange, as loose and fixed flange construction, without upstand for bituminous and plastic roofing sheets, roof penetration depth 106 mm, with DRAINJET hood made of stainless steel, according to DIN EN 1253, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe according to system data sheet LX2331, made of stainless steel, DN100

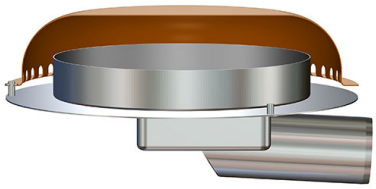

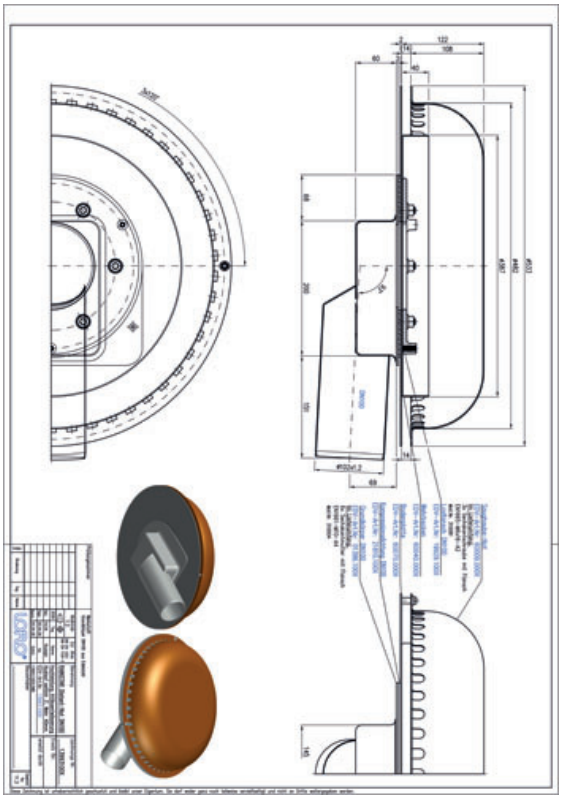

Artikkeldata

EAN-kode	4038088110270
ETIM-klasse	EC010400
Nominell diameter	DN 100
Utvendige mål (HxBxL)	250 x 533 x 555 mm
Vekt	11,30 Kg (STK)
Produktgruppe	9
Tolltariffnummer	73072980
Materiale / Farge	Edelstahl, Silber

Bruksanvisning

LORO-X RAINSTAR-Distant Attikaentwässerung ohne Aufkantung ermöglicht den Einbau des Ablaufes in variablem Abstand zur Attika. So ist es möglich die Dachschräge zur Attika wieder ansteigen zu lassen und den tiefsten Punkt weiter zur Dachmitte zu verlagern. Die Verlegung des waagerechten Rohres kann z.B. innerhalb der Wärmedämmung erfolgen.Die Abdichtung erfolgt nur in einer Ebene mit LORO-Klemmflansch. Die Silent-Power Druckströmung in Kombination mit der patentierten 2-stufigen Beschleunigung des Wassers im Ablauf sorgt für starke Abflussleistung von bis zu 21 l/s.Zu beachten ist jedoch, dass ein zu großer Abstand zur Attika die Abflussleistung beeinträchtigen kann.Vorteile: -Variable Entfernung zur Attika -bis 26,0 l/s als Notentwässerung bei 75mm -hohe Abflussleistung durch patentiertes, tiefergelegtes Rohr -nur eine horizontale Abdichtungsebene -patentiertes Notentwässerungswehr unter der Haube

Nedlastinger

Alles online

Monteringsanvisning (PDF)
Godkjenning (PDF)
BIM 3D (STEP)
Måltegning (PDF)
CAD 2D (DXF)
BIM 3D (IFC)
Brosjyre (PDF)
CAD 3D (DWG)