
LX RETENTIONSDREHSCHIEBER, DN 100

LORO-X retention rotary valve DN 100

Voce di capitolato

LORO-X retention rotary slide, consisting of upper and lower part. Attention: the amoount of retention discharge has to be installed and set according to specification sheet LX3035, made of stainless steel, DN 100



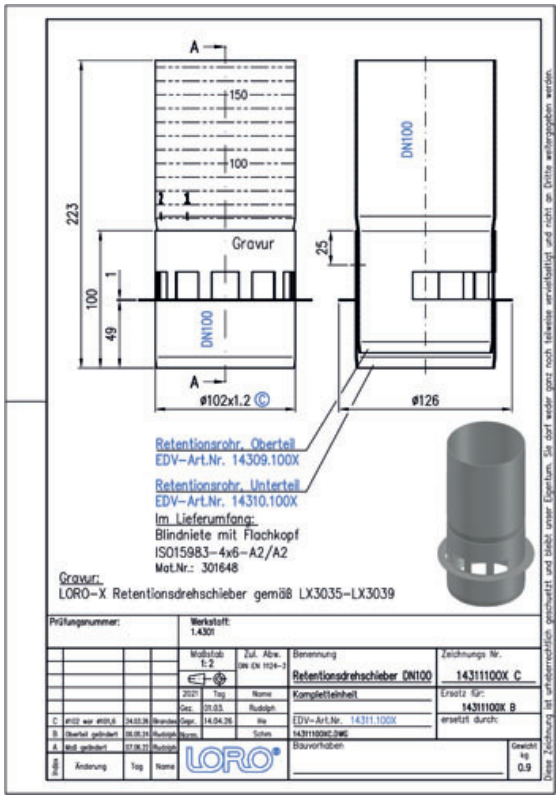

Dati articolo

Codice EAN	**4038088105306**
Classe ETIM	**EC010917**
Diametro nominale	**DN 100**
Misure esterne (AxLxP)	**223 x 110 x 110 mm**
Peso	**0,90 Kg (STK)**
Gruppo prodotti	**4**
Numero tariffa doganale	**73072980**
Materiale / Colore	**Edelstahl, Silber**

Note d'uso

LORO bietet für Hauptentwässerung mit Retention und Notentwässerung mit höhenvariablem Wehr aufeinander abgestimmte VARIOFIT Strömungshilfen, die objektbezogen berechnet und gefertigt werden. Die Höhe des Anstauelementes der Notentwässerung wird objektbezogen an die Retentionswasserhöhe der Hauptentwässerung mit Retention angepasst. Die aufgeführten Strömungshilfen passen auf die Grundkörper der angegebenen Serien der Flachdachentwässerung.

Download

Alles online

Disegno dimensionale (PDF)
CAD 2D (DXF)
CAD 3D (DWG)
BIM 3D (STEP)
BIM 3D (IFC)