

LX-RETENTIONSEINH.F.DL.SR.84,HPT.

LORO-X retention unit for DRAINLET DN 125 with retention openings according to specification including strainer basket 210 mm

Voce di capitolato

LORO-X VARIOFIT flow aid for retention roof drainage, strainer basket 210 mm, building-related design, please contact LOROWERK for the determination of the necessary retention openings, for the main drainage and height-adjustable retention pipe, to fit DRAINLET flat roof drain, series 84(DL), DN 125



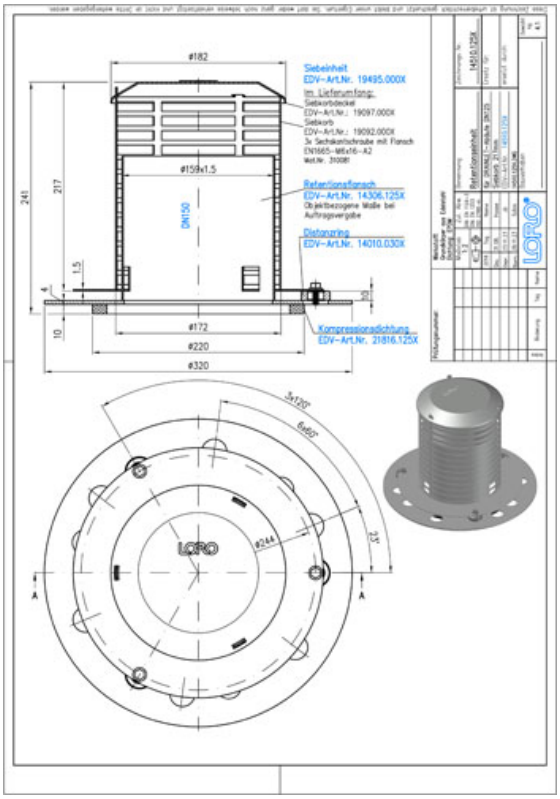

Dati articolo

Codice EAN	**4038088101049**
Classe ETIM	**EC011398**
Diametro nominale	**DN 125**
Misure esterne (AxLxP)	**236 x 320 x 320 mm**
Peso	**4,10 Kg (STK)**
Gruppo prodotti	**9**
Numero tariffa doganale	**73072980**
Materiale / Colore	**Edelstahl, Silber**

Note d'uso

LORO bietet für Hauptentwässerung mit Retention und Notentwässerung mit höhenvariablem Wehr aufeinander abgestimmte VARIOFIT Strömungshilfen, die objektbezogen berechnet und gefertigt werden. Die Höhe des Anstauelementes der Notentwässerung wird objektbezogen an die Retentionswasserhöhe der Hauptentwässerung mit Retention angepasst. Die aufgeführten Strömungshilfen passen auf die Grundkörper der angegebenen Serien der Flachdachentwässerung.

Download

Alles online

Disegno dimensionale (PDF)
Aufbauschema (PDF)
BIM 3D (STEP)
Brochure (PDF)
CAD 2D (DXF)
BIM 3D (IFC)
Certificato (PDF)
CAD 3D (DWG)