LX DL-RETENTIONSEINH.SR.84,1-TLG.M.SIEBK

LORO-X DRAINLET retention unit series 84 one-piece with strainer basket

Beskrivelsestekst

LORO-X retention roof drain, for main drainage and retention rotary slide Series 84 to be adjusted on site, with gravity flow, without thermal insulation, horizontal runoff, with clamping flange, as loose and fixed flange construction, without upstand for bituminous and plastic sealing sheets, according to specification sheet LX3035, DN 100



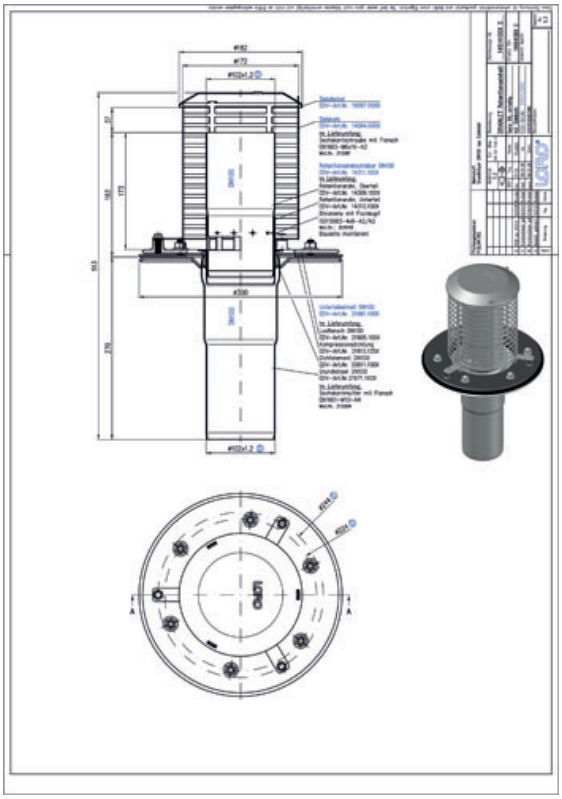

Artikkeldata

EAN-kode	4038088105313
ETIM-klasse	EC010284
Nominell diameter	DN 100
Utvendige mål (HxBxL)	513 x 300 x 300 mm
Vekt	5,30 Kg (STK)
Produktgruppe	4
Tolltariffnummer	73072980
Materiale / Farge	Edelstahl, Silber

Bruksanvisning

Der LORO-X VARIOFIT Retentions-Dachablauf mit Retentionsrohr und Retentionsöffnungen ermöglicht die geplante Regenwasserrückhaltung auf dem Dach. Die Größe der Retentionsöffnungen wird mit einem von LORO entwickelten und durch Messungen bestätigten Programm objektbezogen berechnet. Per modernster Lasertechnik wird die Retentionsöffnung in das Retentionsrohr geschnitten und per Laser-Gravur beschriftet, sodass die Zuordnung des Retentionsrohres zu der Teildachfläche gewährleistet ist. Einsatzgebiete Flachdächer mit Retention, Gründächer, Anstaubewässerung, Kiesdächer, Regenwasserrückhaltung auf dem Dach, Regenwassernutzung, Entlastung der Kanalisation.

Nedlastinger

Alles online

Måltegning (PDF)
CAD 3D (DWG)
Systemdatablad LX 3035
BIM 3D (STEP)
CAD 2D (DXF)
BIM 3D (IFC)