## LORO-X BALKONENTW.-EINH.300 MM,M.HOEHENV

**LORO-X balcony drainage unit 300 mm with height adjustment DN 50/50**

### Voce di capitolato

LORO-X balcony drainage unit, series BE with supporting edge, one-piece, without thermal insulation, lateral outlet 3 degrees, according to DIN EN 1253 with raised quality standard, made of steel, hot-dip galvanized, with long-life coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, consisting of: drain unit with drain pot DN50 with clamping ring (clamping ring width 35 mm circumferential), sealing element, holding fixture for strainer 100 x 100 mm (for installation height 35 - 140 mm), stainless steel strainer, DN50



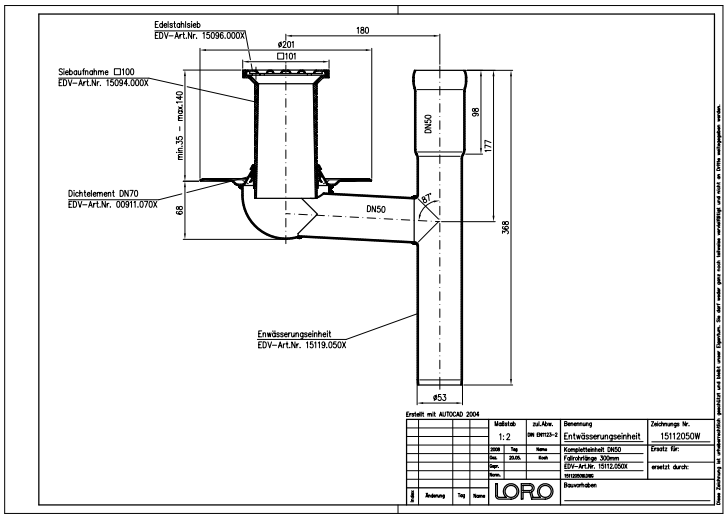


### Dati articolo

| | |
|---|---|
| Codice EAN | **4038088054666** |
| Classe ETIM | **EC004949** |
| Diametro nominale | **DN 50, DN 50** |
| Lunghezza/grado nominale | **300** |
| Misure esterne (AxLxP) | **201 x 312 x 368 mm** |
| Peso | **1,80 Kg (STK)** |
| Gruppo prodotti | **4** |
| Numero tariffa doganale | **73089098** |
| Materiale / Colore | **Stahl feuerverzinkt, Silber** |

### Note d'uso

Serie BE beinhaltet Einzelabläufe mit Stützrand aus Stahl mit Endsieb und angeschlossenem Fallrohr mit Langmuffe zum Anschluss der Fallleitung zwischen den Balkongeschossen. Balkonentwässerungseinheiten Serie BE (bestehend aus Fallrohrteil und Ablauf) und Balkonentwässerungsabzweige besitzen Langmuffen zum Toleranzausgleich von +/- 30 mm. Einsatzgebiete Balkone ohne Abdichtungsbahnen mit Gussasphalt, Fertigestrich oder Fliesenbelag im Mörtelbett.

### Download

Alles online

Disegno dimensionale (PDF)
Aufbauschema (PDF)
CAD 2D (DXF)
Brochure (PDF)
Scheda tecnica del sistema LX 930
CAD (DWG)
Certificato (PDF)
Scheda tecnica del sistema LX 925