
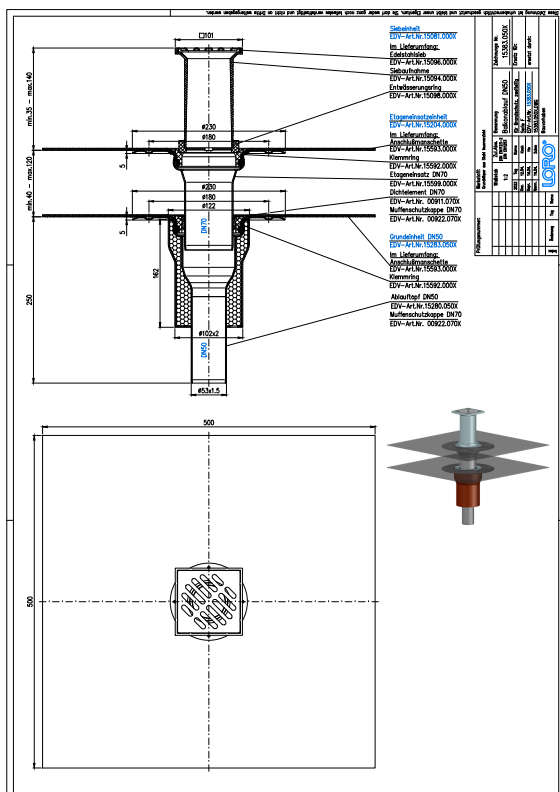


## LORO-X BALKONABL.F.BRANDSCHUTZ,SENKR.2TL

LORO-X balcony drain for fire protection vertical two-piece with height adjustment series F DN 50

### Kuvaus

LORO-X balcony drain, fire protection system, series F, general building authority test certificate no. P-MPA-E-09-010, two-piece, with thermal insulation, vertical outlet, with pre-fitted connecting collar made of bitumen/EPDM composite, according to DIN EN 1253 with raised quality standard, made of steel, hot-dip galvanized, with long-life coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, consisting of drain pot, connecting collar, clamping ring, sealing element, extension cartridge (for installation height 40 - 120 mm), connecting collar, clamping ring, drainage ring, holding fixture for strainer 100 x 100 mm (for installation height 35 - 150 mm), stainless steel strainer, DN50



### Tuotetiedot

|                      |                             |
|----------------------|-----------------------------|
| EAN-koodi            | 4038088044711               |
| ETIM-luokka          | EC011398                    |
| Nimellishalkaisija   | DN 50                       |
| Paino                | 4,80 Kg (STK)               |
| Tuoteryhmä           | 4                           |
| Tullitariffin numero | 73089098                    |
| Materiaali / Väri    | Stahl feuerverzinkt, Silber |

### Käyttöohje

Die Serien E und F beinhalten Balkonabläufe als Einzelabläufe mit Anschlussmanschette. Serie F beinhaltet Einzelabläufe mit Anschlussmanschette mit höhenverstellbarer Siebaufnahme und Endsieb aus Edelstahl.

### Lataukset



Alles online

[Asennusohje \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Mittapiirustus \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)