

LORO-X BALCONY DRAINS, SERIES E+F, BASE UNIT, HORIZONTAL SOCKET, WITH THERMALINSULATION DN 50

LORO-X balcony basic unit 3 degrees with insulation DN 50

Kuvaus

LORO balcony drain base unit with connecting collar made of bitumen/EPDM composite, series E and F, according to DIN EN 1253 with raised quality standard, made of steel, hot-dip galvanized, long-life outside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, outlet 3 degrees, with thermal insulation, consisting of thermally insulated drain pot, connecting collar and clamping ring, DN50




Tuotetiedot

EAN-koodi	4038088008294
ETIM-luokka	EC004949
Nimellishalkaisija	DN 50
Ulkomitat (KxLxS)	230 x 366 x 119 mm
Paino	2,30 Kg (STK)
Tuoteryhmä	4
Tullitariffin numero	73089098
Materiaali / Väri	Stahl feuerverzinkt, Silber

Käyttöohje

kein Verwendungshinweis notwendig

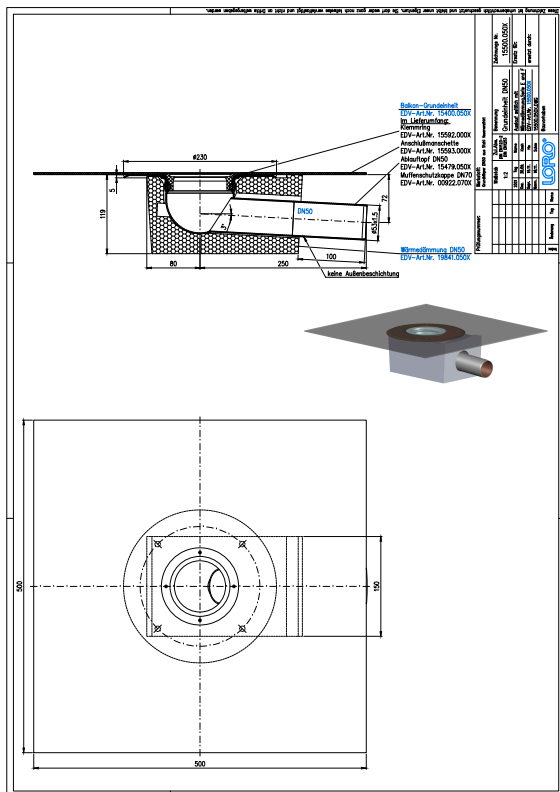

Lataukset



Alles online

[Asennusohje \(PDF\)](#)

[Hyväksyntä \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Mittapiirustus \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Esite \(PDF\)](#)

[CAD 3D \(DWG\)](#)