


LORO-X FLACHDACHABL.A.STAHL VERZ.,F.FLÜS

LORO-X Galvanised steel flat roof drain for liquid plastic DN 80

Kuvaus

LORO-X flat roof renovation drain, one-piece, without thermal insulation, vertical outlet, for main drainage with gravity flow, discharge rate 5.6 l/s at 35 mm water level on the roof, with bonding flange for liquid plastic, with transition sealing element for pipe internal diameter 98-106 mm, according to DIN EN 1253 with raised quality standard, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe, made of steel, hot-dip galvanized, DN 80

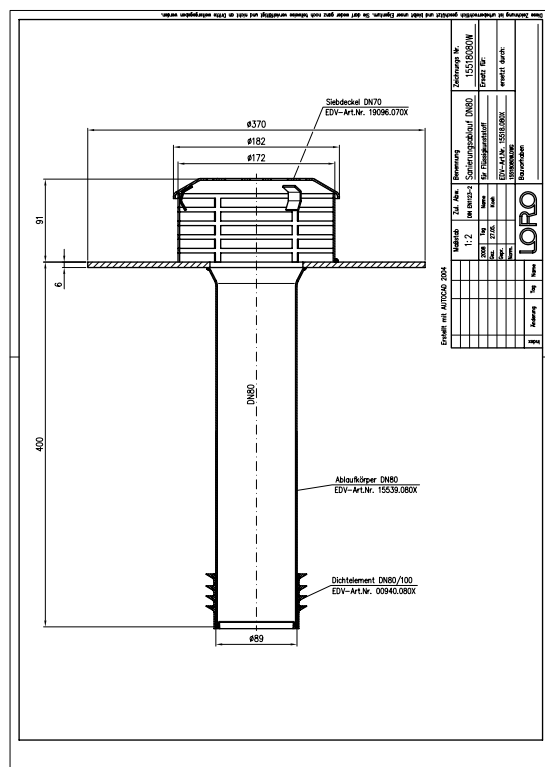

Tuotetiedot

EAN-koodi	4038088077955
ETIM-luokka	EC011398
Nimellishalkaisija	DN 80
Ulkomitat (KxLxS)	370 x 370 x 494 mm
Paino	7,00 Kg (STK)
Tuoteryhmä	4
Tullitariffin numero	73089098
Materiaali / Väri	Stahl feuerverzinkt, Silber

Käyttöohje

LORO-Flachdach-Sanierungsablauf mit Klebeflansch für Flüssigkunststoff DN 80 mit Übergangs-Dichtelement für Rohr-Innendurchmesser 98 - 106 mm

Lataukset



Alles online

[Asennusohje \(PDF\)](#)

[Hyväksyntä \(PDF\)](#)

[Mittapiirustus \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Esite \(PDF\)](#)

[CAD \(DWG\)](#)