


LORO-X FLACHDACHABL.A.STAHL VERZ.,F.FLÜS

LORO-X Galvanised steel flat roof drain for liquid plastic DN 80

Popis

LORO-X flat roof renovation drain, one-piece, without thermal insulation, vertical outlet, for main drainage with gravity flow, discharge rate 5.6 l/s at 35 mm water level on the roof, with bonding flange for liquid plastic, with transition sealing element for pipe internal diameter 98-106 mm, according to DIN EN 1253 with raised quality standard, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe, made of steel, hot-dip galvanized, DN 80

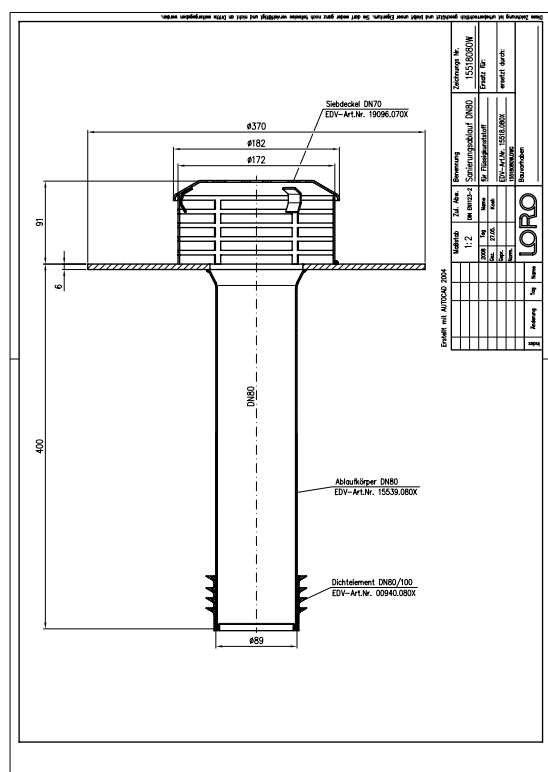

Údaje o artiklu

EAN kód	4038088077955
ETIM třída	EC011398
Jmenovitý průměr	DN 80
Vnější rozměry (VxŠxD)	370 x 370 x 494 mm
Hmotnost	7,00 Kg (STK)
Skupina produktů	4
Celní sazebník	73089098
Materiál / Barva	Stahl feuerverzinkt, Silber

Pokyny k použití

LORO-Flachdach-Sanierungsablauf mit Klebeflansch für Flüssigkunststoff DN 80 mit Übergangs-Dichtelement für Rohr-Innendurchmesser 98 - 106 mm

Ke stažení



Alles online

[Návod k instalaci \(PDF\)](#)

[Certifikát \(PDF\)](#)

[Výkres rozměrů \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Prospekt \(PDF\)](#)

[CAD \(DWG\)](#)