LORO-X BALCONY DRAINS, SERIES F, SINGLE-PART UNIT, HORIZONTAL SOCKET, WITH THERMAL INSULATION DN 50

LORO-X balcony drain 3 degrees one-piece with heat insulation with height adjustment DN 50

Описание

LORO-X balcony drain, series F, one-piece, with thermal insulation, lateral outlet 3 degrees, with pre-fitted connecting collar made of bitumen/EPDM composite, according to DIN EN 1253 with raised quality standard, made of steel, hot-dip galvanized, with long-life coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, consisting of drain pot, connecting collar, clamping ring, drainage ring, holding fixture for strainer 100 x 100 mm (for installation height 35 - 150 mm), stainless steel strainer DN50

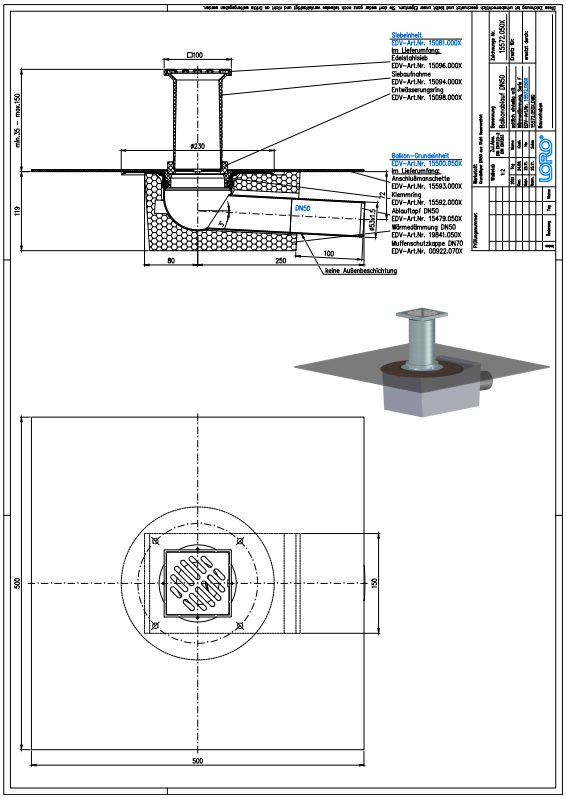

Данни за артикула

EAN код	4038088008348
ETIM клас	EC004949
Номинален диаметър	DN 50
Външни размери (ВхШхД)	230 x 366 x 272 mm
Тегло	2,60 Kg (STK)
Продуктова група	4
Митнически тарифен номер	73089098
Материал / Цвят	Stahl feuerverzinkt, Silber

Забележка за употреба

Die Serien E und F beinhalten Balkonabläufe als Einzelabläufe mit Anschlussmanschette. Serie F beinhaltet Einzelabläufe mit Anschlussmanschette mit höhenverstellbarer Siebaufnahme und Endsieb aus Edelstahl.. Im Standard werden die Serien E und F aus feuerverzinktem Stahl mit zusätzlicher Beschichtung gefertigt. Auf Anfrage ist auch die Fertigung aus massivem Kupfer möglich.Einsatzgebiete Balkone mit Abdichtungsbahnen, Fliesen- oder Plattenbelag.

Изтегляния

Alles online

[Инструкция за монтаж (PDF)](#)
[Сертификат (PDF)](#)
[CAD 2D (DXF)](#)
[BIM 3D (IFC)](#)
[CAD чертеж (PDF)](#)
[Aufbauschema (PDF)](#)
[CAD 3D (DWG)](#)
[Брошура (PDF)](#)
[Системен технически лист LX 966](#)
[BIM 3D (STEP)](#)