

LORO-X SINGLE DRAIN TYPE A, WITH LATERAL RUN-OFF

LORO-X single outlet with support edge 35 mm

Description

LORO-X balcony drain, series A with supporting edge, one-piece, without thermal insulation, lateral outlet 3 degrees, according to DIN EN 1253 with raised quality standard, made of steel, hot-dip galvanized, with long-life coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, consisting of: drain pot (clamping ring width 35 mm circumferential), sealing element, plastic strainer 82 x 82 mm (for installation height approx. 30 +/- 5 mm), DN70




Article information

EAN Code	4038088008751
ETIM Class	EC011398
Nominal diameter	DN 70
Weight	1,60 Kg (STK)
Product group	4
Customs tariff number	73089098
Material / Color	Stahl feuerverzinkt, Silber

Usage note

Serie A beinhaltet Einzelabläufe mit Stützrand aus Stahl mit Endsieb. Beide Serien weisen Öffnungen für Sickerwasser oberhalb des Stützrandes auf, sodass Restwasserbildung vermieden wird. Einsatzgebiete Balkone ohne Abdichtungsbahnen mit Gussasphalt, Fertigestrich oder Fliesenbelag im Mörtelbett.

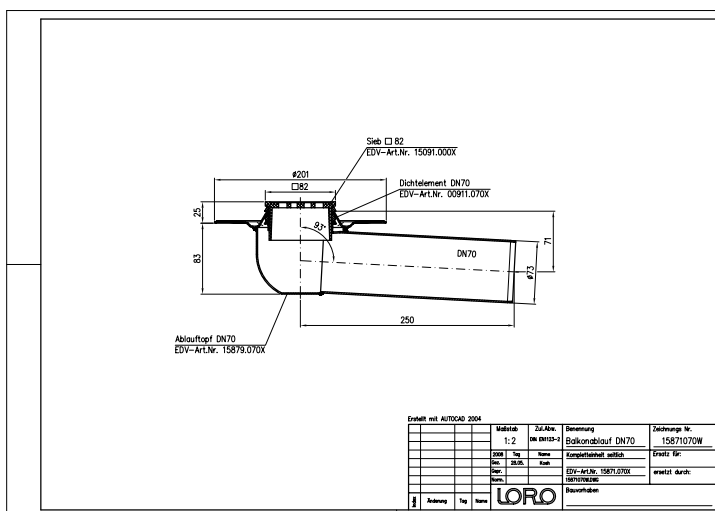

Downloads



Alles online

[CAD drawing \(PDF\)](#)
[CAD \(DWG\)](#)
[Brochure \(PDF\)](#)
[CAD 2D \(DXF\)](#)