

LORO-X BALKONDIREKTABL.GRUNDEINH.M.WD.

LORO-X balcony direct drain basic unit with heat insulation DN 100

Kuvaus

LORO direct balcony drain base unit, with connecting collar made of bitumen/EPDM composite, series H, according to DIN EN 1253, made of steel, hot-dip galvanized, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, vertical outlet, with downpipe length 250 mm, with thermal insulation, consisting of drain pot, connecting collar, clamping ring without drainage openings, DN100




Tuotetiedot

EAN-koodi	4038088044834
ETIM-luokka	EC004949
Nimellishalkaisija	DN 100
Ulkomitat (KxLxS)	330 x 330 x 250 mm
Paino	4,90 Kg (STK)
Tuoteryhmä	4
Tullitariffin numero	73089098
Materiaali / Väri	Stahl feuerverzinkt, Silber

Käyttöohje

kein Verwendungshinweis notwendig

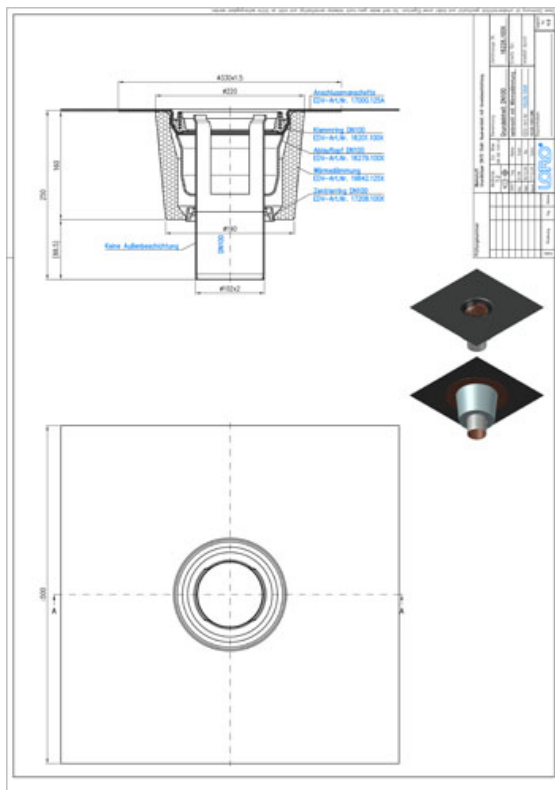

Lataukset



Alles online

[Asennusohje \(PDF\)](#)

[Hyväksyntä \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Mittapiirustus \(PDF\)](#)

[Aufbauschema \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Esite \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)