


LORO-X BALKONDIREKTTABL.GRUNDEINH.M.WD.

LORO-X balcony direct drain basic unit with heat insulation DN 100

Popis

LORO direct balcony drain base unit, with connecting collar made of bitumen/EPDM composite, series H, according to DIN EN 1253, made of steel, hot-dip galvanized, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, vertical outlet, with downpipe length 250 mm, with thermal insulation, consisting of drain pot, connecting collar, clamping ring without drainage openings, DN100

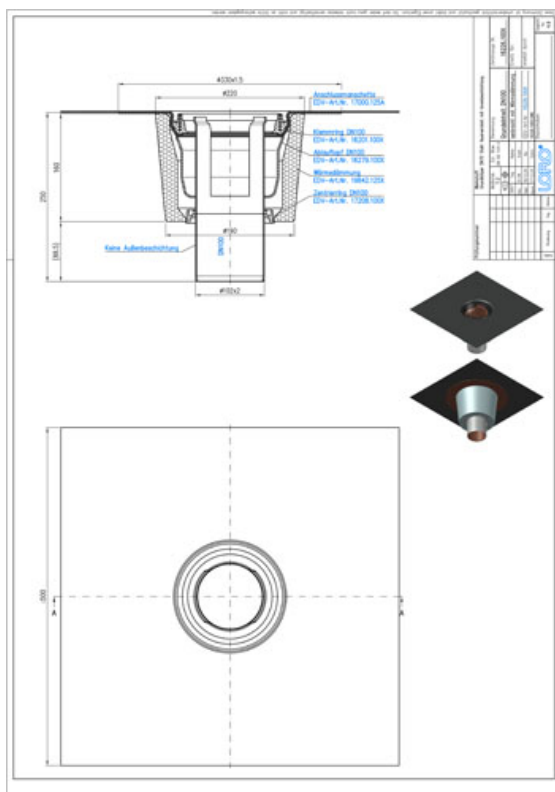

Údaje o artikli

EAN kód	4038088044834
ETIM trieda	EC004949
Menovitý priemer	DN 100
Vonkajšie rozmery (VxŠxH)	330 x 330 x 250 mm
Hmotnosť	4,90 Kg (STK)
Skupina produktov	4
Colný sadzovník	73089098
Materiál / Farba	Stahl feuerverzinkt, Silber

Pokyny na použitie

kein Verwendungshinweis notwendig

Na stiahnutie



Alles online

[Návod na montáž \(PDF\)](#)

[Certifikát \(PDF\)](#)

CAD 3D (DWG)

[Rozmerový výkres \(PDF\)](#)

[Aufbauschema \(PDF\)](#)

BIM 3D (STEP)

[Prospekt \(PDF\)](#)

CAD 2D (DXF)

BIM 3D (IFC)