


LORO-X BALKONDIREKTABL.GRUNDEINH.M.WD.

LORO-X balcony direct drain basic unit with heat insulation DN 100

Opis

LORO direct balcony drain base unit, with connecting collar made of bitumen/EPDM composite, series H, according to DIN EN 1253, made of steel, hot-dip galvanized, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, vertical outlet, with downpipe length 250 mm, with thermal insulation, consisting of drain pot, connecting collar, clamping ring without drainage openings, DN100

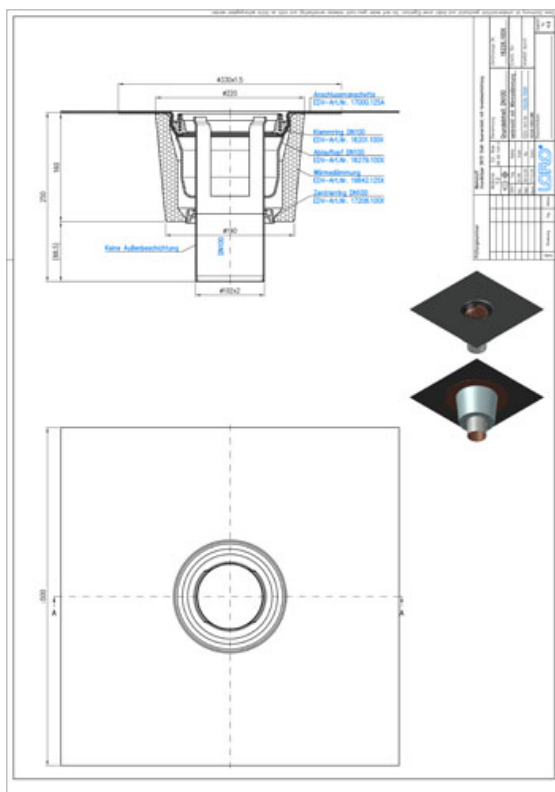

Dane artykułu

Kod EAN	4038088044834
Klasa ETIM	EC004949
Średnica nominalna	DN 100
Wymiary zewnętrzne (WxSxD)	330 x 330 x 250 mm
Waga	4,90 Kg (STK)
Grupa produktów	4
Numer taryfy celnej	73089098
Materiał / Kolor	Stahl feuerverzinkt, Silber

Wskazówki dotyczące użytkowania

kein Verwendungshinweis notwendig

Pobieranie



Alles online

[Instrukcja montażu \(PDF\)](#)

[Certyfikat \(PDF\)](#)

CAD 3D (DWG)

[Rysunek wymiarowy \(PDF\)](#)

[Aufbauschema \(PDF\)](#)

BIM 3D (STEP)

[Broszura \(PDF\)](#)

CAD 2D (DXF)

BIM 3D (IFC)